

DRAFT

ORNL/ER-7

**ornl**

**OAK RIDGE  
NATIONAL  
LABORATORY**

**MARTIN MARIETTA**

**Transport and Accumulation of  
Cesium-137 and Mercury in the  
Clinch River and Watts Bar  
Reservoir System**

**C. R. Olsen, I. L. Larsen, P. D. Lowry,  
C. R. Moriones, C. J. Ford, K. C. Dearstone,  
R. R. Turner, B. L. Kimmel**

**ISSUED FOR COMMENT**

611  
OPERATED BY  
MARTIN MARIETTA ENERGY SYSTEMS, INC.  
FOR THE UNITED STATES  
DEPARTMENT OF ENERGY

#### DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

DRAFT

ORNL/ER-7

Environmental Restoration Division  
Off-Site Investigations Environmental Restoration Program

**Transport and Accumulation of Cesium-137 and Mercury  
in the Clinch River and Watts Bar Reservoir System**

C. R. Olsen,<sup>1</sup> I. L. Larsen,<sup>1</sup> P. D. Lowry,<sup>2</sup> C. R. Moriones,<sup>3</sup>  
C. J. Ford,<sup>4</sup> K. C. Dearstone,<sup>1</sup> R. R. Turner,<sup>1</sup>  
B. L. Kimmel<sup>1</sup>

Environmental Sciences Division  
Publication No. 3471

March 1990

Prepared for  
U.S. Department of Energy  
Office of Waste Management and Environmental Restoration  
under budget and reporting codes CD 10 72 and GF 72

Prepared by  
Oak Ridge National Laboratory  
Oak Ridge, Tennessee 37831-6285  
operated by  
MARTIN MARIETTA ENERGY SYSTEMS, INC.  
for the  
U.S. DEPARTMENT OF ENERGY  
under contract DE-AC05-84OR21400

---

<sup>1</sup>Environmental Sciences Division, Oak Ridge National Laboratory, P.O. Box 2008, Oak Ridge, TN 37831-6352.

<sup>2</sup>Department of Anesthesiology, Emory University School of Medicine, Atlanta, GA 30322.

<sup>3</sup>Health Physics Research Division, Philippine Atomic Energy Commission, Diliman, Quezon City, Philippines.

<sup>4</sup>Advanced Sciences Incorporated, Oak Ridge, TN 37830.

DRAFT



# CONTENTS

	<u>Page</u>
LIST OF FIGURES . . . . .	v
LIST OF TABLES . . . . .	vii
ACKNOWLEDGMENTS . . . . .	ix
ABSTRACT . . . . .	xi
INTRODUCTION . . . . .	1
HISTORY OF CONTAMINANT RELEASES . . . . .	3
PREVIOUS STUDIES . . . . .	6
MATERIALS AND METHODS . . . . .	16
SEDIMENT ANALYSES . . . . .	17
WATER ANALYSES . . . . .	21
RESULTS AND DISCUSSION . . . . .	22
CONTAMINANTS IN THE WATER COLUMN . . . . .	23
CONTAMINANTS IN BOTTOM SEDIMENTS . . . . .	25
RADIONUCLIDE DISTRIBUTIONS . . . . .	26
MERCURY AND <sup>137</sup> Cs CORRELATIONS . . . . .	39
HISTORICAL CONCENTRATIONS OF DISSOLVED MERCURY IN WATTS BAR RESERVOIR . . . . .	42
SUMMARY . . . . .	48
REFERENCES . . . . .	51
APPENDIX A: RADIONUCLIDE CONCENTRATIONS IN WATTS BAR RESERVOIR SEDIMENTS . . . . .	A-1



## LIST OF FIGURES

<u>Figure</u>	<u>Page</u>
1 Map showing the Clinch River and Tennessee River tributaries to Watts Bar Reservoir and the location of the three DOE facilities on the ORR . . . . .	2
2 Aquatic discharge histories for Hg from the Y-12 Plant and for $^{137}\text{Cs}$ from ORNL . . . . .	4
3 Vertical distribution of $^{137}\text{Cs}$ , mercury, uranium, and several other contaminants in (1) a sediment core collected at the junction of East Fork Poplar Creek and Poplar Creek, (2) a sediment core collected in Poplar Creek just downstream of ORGDP, and (3) a sediment core collected near the mouth of the Clinch River at Kingston . . . . .	10
4 Vertical profiles of $^{137}\text{Cs}$ and mercury for selected sediment cores collected in the Tennessee River Reservoir system. . .	12
5 Map of Watts Bar Reservoir indicating the locations and identifying the sediment cores collected in this study . . .	13
6 Map of Watts Bar Reservoir indicating the locations of the surface grab samples collected in this study . . . . .	14
7 Map of the surface sedimentary characteristics based on the visual textural analysis of more than 190 surface sediment samples collected in Watts Bar Reservoir. . . . .	15
8 Map of Watts Bar Reservoir illustrating the average $^{137}\text{Cs}$ concentration in the top 16 cm of sediment . . . . .	27
9 Vertical distribution of $^{137}\text{Cs}$ with sediment depth in cores KCP, 567.5, 5-4-5, 6-2-1, 8-1-4, 8-2-3, 9-4-3, and 11-2-1 . .	28
10 Vertical profiles for $^{137}\text{Cs}$ , $^{60}\text{Co}$ , and excess $^{210}\text{Pb}$ in sediment Core 567.5 . . . . .	30
11 Vertical distribution of $^{90}\text{Sr}$ in sediment Core 567.5 . . . .	31
12 Vertical profiles for $^{137}\text{Cs}$ and excess $^{210}\text{Pb}$ in the sediments of Norris Reservoir . . . . .	33
13 Map of Watts Bar Reservoir illustrating the GIS polygonal areas that were used for integrating the sediment core data over the entire reservoir . . . . .	35
14 Map of Watts Bar Reservoir illustrating $^{137}\text{Cs}$ accumulation patterns and total inventories . . . . .	36

# LIST OF FIGURES (continued)

<u>Figure</u>		<u>Page</u>
15	Map of Watts Bar Reservoir illustrating the inventory of $^{137}\text{Cs}$ in the top 50 cm of sediment . . . . .	37
16	Map of Watts Bar Reservoir illustrating the inventory of $^{137}\text{Cs}$ in the top 16 cm of sediment . . . . .	38
17	The history of $^{137}\text{Cs}$ releases from ORNL and Hg releases from Y-12 compared with the vertical distribution of $^{137}\text{Cs}$ and Hg in the sediments of Core KCP . . . . .	40
18	Graphic illustration of the relationship between the concentration of $^{137}\text{Cs}$ and the concentration of Hg in the sediments of Watts Bar Reservoir . . . . .	41
19	Map of Watts Bar Reservoir illustrating Hg accumulation patterns and total inventories . . . . .	43
20	Map of Watts Bar Reservoir illustrating the Hg inventory in the upper 16 cm of sediment . . . . .	44
21	Map of Watts Bar Reservoir illustrating the average Hg concentration in upper 16 cm of sediment . . . . .	45



## LIST OF TABLES

<u>Table</u>	<u>Page</u>
1 Annual discharges of radionuclides from White Oak Lake to the Clinch River, 1944 to 1984 . . . . .	5
2 Vertical distribution of $^{137}\text{Cs}$ , mercury, and uranium in a Poplar Creek sediment core collected near Blair Road Bridge .	8
3 Environmental Protection Agency's EMSL-LV Intercomparison Study, April 1987, Marinelli Beaker geometry . . . . .	19
4 National Bureau of Standards Reference Material 4353 Rocky Flats Soil, aluminum can geometry . . . . .	20
5 Contaminant distributions between aqueous and particular phases . . . . .	24
6 Watts Bar sediment Core TRM 567.5 . . . . .	46
7 Watts Bar sediment Core 8-2-3 . . . . .	47



## ACKNOWLEDGMENTS

We would like to thank Werner Furth of Martin-Marietta Energy Systems Central Staff, Tim Myrick of the ORNL Remedial Action Program, and Todd Butz of the Y-12 Remedial Action Program for recognizing the need for initiation of this off-site scoping activity. This project was begun as a component of the ORNL Biological Monitoring and Abatement Program directed by Jim Loar.

We also thank Scott Gregory, Della Marshall, and Chris Kauker for field assistance, and Les Hook and Jean Shaakir-Ali for their help with data analysis. Tammy McKenzie, Polly Henry, Gail Epperson, and Donna Rhew provided valuable assistance in preparing various stages of the manuscript. We thank Janet Addison, Janice Asher, and Lydia Corrill for editorial assistance, and the Environmental Sciences Division Graphics Office for producing the figures. Bob Cook and Karen Von Damm provided valuable technical reviews of the manuscript.



## ABSTRACT

Operations and waste disposal activities on the U.S. Department of Energy's Oak Ridge Reservation have introduced cesium-137 ( $^{137}\text{Cs}$ ) and mercury (Hg) into local streams that ultimately drain into the Clinch River and Watts Bar Reservoir system. The highest discharges for both  $^{137}\text{Cs}$  and Hg occurred during the mid-1950s. Measurements of the partitioning of  $^{137}\text{Cs}$  and Hg between dissolved and particulate phases in the reservoir water column indicate that both contaminants have particle-to-water sorption ratios of about  $10^5$  and are therefore strongly associated with particles in this aquatic system. About 190 surface-sediment grab samples and more than 60 sediment cores were collected in Watts Bar Reservoir to (1) determine the extent of downstream contamination and (2) document particle and particle-associated contaminant accumulation patterns. The vertical distributions of  $^{137}\text{Cs}$  and Hg in these sediment cores are strongly correlated ( $r^2 = 0.87$ ), and both contaminants exhibit a large subsurface peak coincident with their peak discharge histories. Concentrations of  $^{137}\text{Cs}$  and Hg as high as 5.6 Bq/g and 47  $\mu\text{g/g}$ , respectively, occur in this subsurface peak. The sediment depth of this subsurface peak and the thickness of contaminated sediment varies with location in the reservoir and depends on the rate of sediment accumulation. The total accumulation of  $^{137}\text{Cs}$  in Watts Bar Reservoir sediments has been estimated by measuring the  $^{137}\text{Cs}$  inventory in each sediment core and extrapolating these data spatially with a Geographic Information System and ARC:INFO software package. Results indicate that about 290 Ci ( $1.07 \times 10^{13}$  Bq) of  $^{137}\text{Cs}$  now reside in the reservoir sediments. Discharge records indicate that a decay-corrected total of about 335 Ci ( $1.24 \times 10^{13}$  Bq) of  $^{137}\text{Cs}$  have been released into the river system since 1949. This indicates that more than 85% of the total  $^{137}\text{Cs}$  released to the Clinch River and Tennessee River system has been retained by accumulation in Watts Bar Reservoir sediments. Using the strong correlation between the vertical distribution of  $^{137}\text{Cs}$  and Hg in sediment cores, it has been estimated that about 75 metric tons of Hg have also accumulated in the sediments of Watts Bar Reservoir. The

vertical distribution of  $^{137}\text{Cs}$  and Hg in dated sediment cores was also used to document levels of contamination in the reservoir water column during the past 40 years.

## INTRODUCTION

Operations and waste disposal activities at the Oak Ridge Y-12 Plant, the Oak Ridge National Laboratory (ORNL), and the Oak Ridge Gaseous Diffusion Plant (ORGDP) on the U.S. Department of Energy's (DOE's) Oak Ridge Reservation (ORR) have introduced a variety of airborne, liquid, and solid wastes into the surrounding environment. Some of these wastes may affect off-site areas by entering local streams, which ultimately drain into the Clinch and Tennessee river system (Fig. 1). Previously reported concentrations of radionuclides, metals, and organic compounds in water, sediment, and biota of the Clinch River and Watts Bar Reservoir suggest the presence of a variety of contaminants of possible concern to the protection of human health and the environment.

The DOE has initiated a comprehensive waste management and environmental restoration effort to achieve the comprehensive remediation of releases of hazardous substances, pollutants, or contaminants from the Oak Ridge Reservation (Jones et al. 1990). This effort has been undertaken in accordance with a draft Federal Facility Agreement (FFA) between the Environmental Protection Agency (EPA) Region IV, the State of Tennessee, and the DOE. The FFA requires that the cleanup of the ORR and environs be conducted in compliance with both the Resource Conservation and Recovery Act of 1976 (RCRA), as amended by the Hazardous and Solid Waste Amendments of 1984 (HWSA), and the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA) of 1980, as amended by the Superfund Amendments and Reauthorization Act of 1986 (SARA).

The work reported here represents part of the initial scoping phase for the Clinch River RFI; in this work, the distribution of  $^{137}\text{Cs}$  is used to identify contaminant accumulation patterns and potential problem, or "hot-spot," areas with regard to environmental hazard or human health. Radiocesium was chosen for this scoping effort because (1) its history of release into the Clinch River is reasonably well

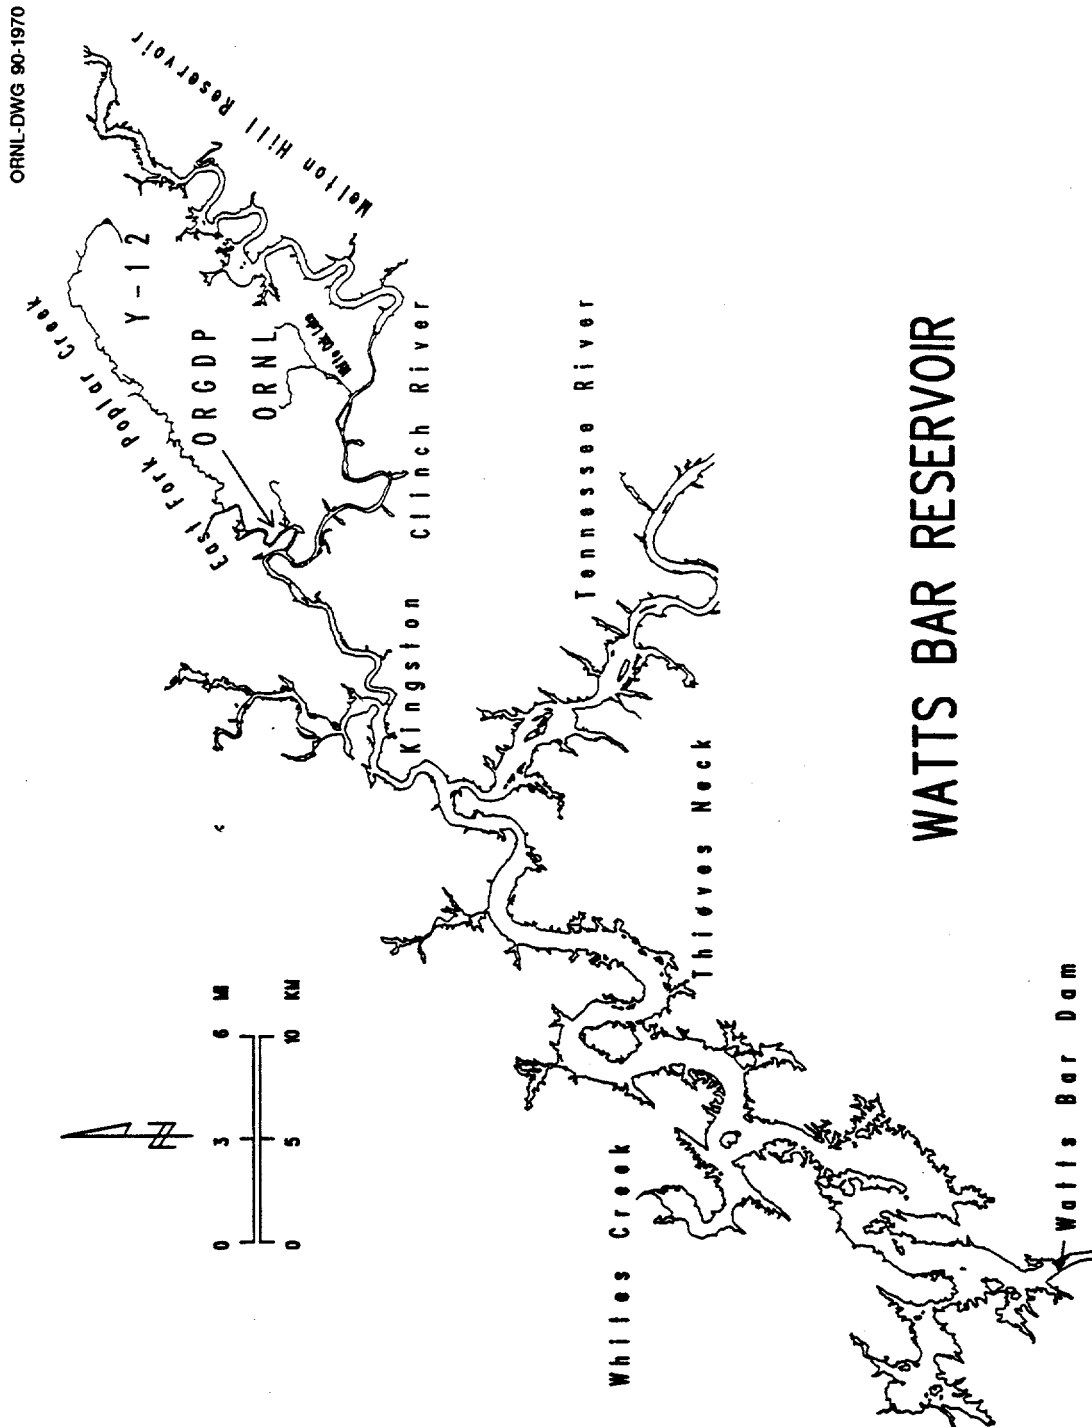


Fig. 1. Map showing the Clinch River and Tennessee River tributaries to Watts Bar Reservoir and the location of the three DOE facilities on the ORR.



documented, (2) it is easy and inexpensive to measure by gamma spectrometry, and (3) it is rapidly sorbed to particulate matter and thus serves as a cost-effective tracer for identifying the transport and accumulation patterns of many other particle-reactive contaminants, such as mercury (Hg), lead (Pb), plutonium (Pu), and polychlorinated biphenyls (PCBs) (Olsen et al. 1989a).

#### HISTORY OF CONTAMINANT RELEASES

During the mid-1950s and early 1960s, relatively large quantities of  $^{137}\text{Cs}$  and Hg were released into the Clinch River in association with nuclear energy research at ORNL and weapons components production at the Y-12 Plant, respectively (Fig. 2). Some of the  $^{137}\text{Cs}$  and other radioactive wastes generated at ORNL enter surface streams that drain into White Oak Lake (WOL) (Fig. 1). Discharges from WOL into the Clinch River are controlled and monitored at White Oak Dam (WOD). Annual discharges of radioactivity from ORNL via WOD are summarized in Table 1. These discharges were calculated by (1) analyzing radionuclide concentrations in weekly flow-proportional samples, (2) multiplying this concentration by the total weekly flow, and (3) integrating these weekly samples for a year. Approximately 665 Ci ( $2.5 \times 10^{13}$  Bq) of  $^{137}\text{Cs}$  has been released from WOL into the Clinch River and Watts Bar Reservoir system. Because most of this release occurred in the mid-1950s in association with the draining of WOL in 1956 (Fig. 2) and because the half-life of  $^{137}\text{Cs}$  is 30 years, the total decay-corrected amount of  $^{137}\text{Cs}$  discharged as of June 1986 was about 335 Ci ( $1.24 \times 10^{13}$  Bq).

Although the history of radionuclide releases from each of the three DOE facilities on the ORR is reasonably well documented (Table 1 in DOE 1988), quantitative information on releases of most other contaminants is either absent or incomplete. During the 1950s and early 1960s, relatively large quantities of metallic Hg were released to surface waters (Fig. 2) in association with the production-scale lithium-isotope separation process initiated at the Y-12 Plant in 1953. In this process, lithium isotopes are separated as they are transferred between two chemical phases. One of these phases is a solution of

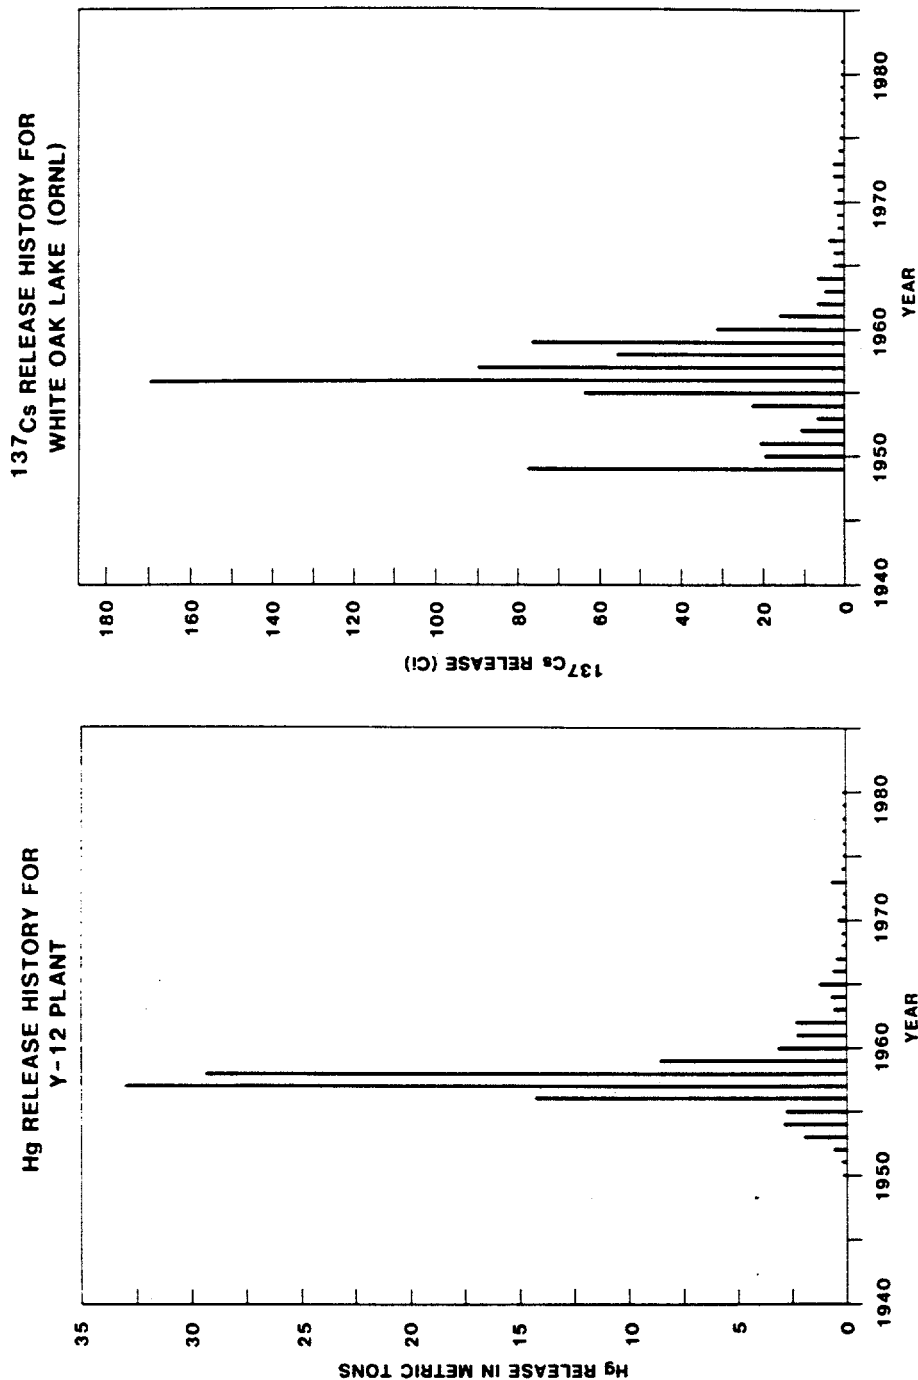


Fig. 2. Aquatic discharge histories for Hg from the Y-12 Plant and for  $^{137}\text{Cs}$  from ORNL. A comparison of these discharge histories indicates a near coincidence in the peak release of  $^{137}\text{Cs}$  in 1956 (with the draining of White Oak Lake) and that of Hg in 1957-1958 and sharp declines in both releases after 1959.

Table 1. Annual discharges (curies) of radionuclides from White Oak Lake to the Clinch River, 1944 to 1984<sup>a</sup>

Year	Beta	<sup>137</sup> Cs	<sup>106</sup> Ru	<sup>89</sup> Sr	<sup>90</sup> Sr	TRE(-Ce) <sup>b</sup>	<sup>144</sup> Ce	<sup>95</sup> Zr	<sup>95</sup> Nb	<sup>131</sup> I	<sup>60</sup> Co	<sup>3</sup> N	TRU
1944 <sup>c</sup>	600												
1945 <sup>c</sup>	500												
1946 <sup>c</sup>	900												
1947 <sup>c</sup>	200												
1948 <sup>c</sup>	494												
1949		77	110		150	77	18	180	22	77		NA <sup>d</sup>	0.04
1950		19	23		38	30	NA	15	42	19			0.04
1951		20	18		29	11	NA	5	2	18			0.08
1952		10	15		72	26	23	19	18	20			0.03
1953		6	26		130	110	7	8	4	2			0.08
1954		22	11		140	160	24	14	9	4			0.07
1955		63	31		93	150	85	5	6	7			0.25
1956		170	29		100	140	59	12	15	4			0.28
1957		89	60		83	110	13	23	7	1			0.15
1958		55	42		150	240	30	6	6	8			0.08
1959		76	520		60	94	48	27	30	1			0.68
1960		31	1,900		28	48	27	38	45	5			0.19
1961		15	2,000		22	24	4	20	70	4			0.07
1962		6	1,400		9	11	1	2	8	0.4			0.06
1963		4	430		8	9	2	0.3	0.7	0.4			0.17
1964		6	190		7	13	0.3	0.2	0.1	0.3			0.08
1965		2	69		3	6	0.1	0.3	0.3	0.2			0.50
1966		2	29		3	5	0.1	0.7	0.7	0.2			0.16
1967		3	17		5	9	0.2	0.5	0.5	0.9			1.03
1968		1	5		3	4	0.03	0.3	0.3	0.3			0.04
1969		1	2		3	5	0.02	0.2	0.2	0.5			0.20
1970		2	1		4	5	0.06	0.02	0.02	0.3			0.40
1971		1	0.5		3	3	0.05	0.01	0.01	0.2			0.05
1972		2	0.5		6	5	0.03	0.01	0.01	0.3			0.07
1973		2	0.7		7	NA	0.02	0.05	0.05	0.5			0.08
1974		1	0.2		6		0.02	0.02	0.02	0.2			0.02
1975		0.6	0.3		7		NA	NA	NA	0.3			0.02
1976		0.2	0.2		5				NA	0.03			0.01
1977		0.2	0.2		3					0.03			0.03
1978		0.3	0.2		2					0.04			0.03
1979		0.2	0.1		2.4					0.04			0.04
1980		0.6	0		1.5					0.04			0.04
1981		0.2	0.1		1.5					0.04			0.04
1982		1.5	0.2		2.7					0.06			0.03
1983		1.2	0.2		2.1					0.004			0.05
1984		0.6	0.2		2.6					0.05			0.03

<sup>a</sup>Data from Ohnesorge (1986).<sup>b</sup>Total rare earths minus cerium.<sup>c</sup>Individual radionuclide data not available.<sup>d</sup>No analysis performed.

Source: Clinch River RCRA Facility Investigation, Table 4.8.

lithium in Hg, and, as a result, millions of kilograms of inorganic Hg were used in this separation project. Floor drains were installed in the process building to collect spilled Hg into special tanks in the basement. However, some of this Hg escaped these collection drains and entered into East Fork of Poplar Creek (EFPC) (Fig. 1).

Measurement of aquatic discharges of Hg from the Y-12 Plant began in April 1954. Annual releases of Hg (Fig. 2) are characterized by (1) a sharp increase in 1956 when full-scale lithium isotope processing began; (2) peak releases of 33 and 29 metric tons of inorganic Hg in 1957 and 1958, respectively; and (3) a sharp decline in Hg releases after 1958. Process changes in 1958 resulted in declining releases, and all production had ceased by 1963. The total Hg release to the environment, including estimates for the 1950-to-1954 period, has been estimated to range from about 75 to 150 metric tons (Turner et al. 1985).

#### PREVIOUS STUDIES

The first comprehensive program to identify the transport, accumulation, and fate of contaminants released to off-site areas from the ORR began in the mid 1950s in conjunction with the draining of WOL (Cottrell 1959). In this program, a gamma-radiation survey of surface sediments was conducted with a submersible Geiger-Mueller counting system. Most of the gamma radioactivity ( $^{137}\text{Cs}$ ,  $^{60}\text{Co}$ , rare-earth isotopes, and short-lived  $^{103}\text{Ru}$ ) was found to have been deposited in the sediments of Watts Bar Reservoir, but some could be traced down the Tennessee River system to the Chickamauga Reservoir and beyond.

A second study was conducted over a 5-year period between 1960 and 1964. This "Clinch River Study" was a comprehensive physical, chemical, biological, and sedimentological investigation to determine the environmental fate, ecological effects, and impact on man of radionuclides released to the Clinch River from ORNL (results are summarized by Struxness et al. 1967). Unfortunately, this intensive study was restricted primarily to the Clinch River itself, and the extent of contamination further downstream in Watts Bar Reservoir was not examined. Results indicated that soluble contaminants (e.g.,  $^3\text{H}$  and  $^{90}\text{Sr}$ ) released from WOL were rapidly diluted in the Clinch River and

flushed downstream without accumulating to any great extent (Cowser et al. 1966). Results from  $^{90}\text{Sr}$  analysis of water samples and the shells of freshwater clams showed that concentrations of  $^{90}\text{Sr}$  were detectable in the Tennessee River up to 500 miles downstream from the release point (WOD) and could be accurately predicted on the basis of dilution (Nelson 1969).

Only about 21% of the  $^{137}\text{Cs}$ , 9% of the  $^{60}\text{Co}$ , and less than 1% of the  $^{90}\text{Sr}$  previously released from WOL had accumulated in the sediments of the Clinch River (Pickering et al. 1966; Struxness et al. 1967). As a consequence, Parker et al. (1966) concluded that very little of the radioactive material introduced into the Clinch River remained there in either the bottom sediments or in the biota. Struxness et al. (1967) concluded that the Clinch River functioned much like a pipe, transporting contaminants to sites farther downstream.

A third set of studies of the Clinch River sediments was conducted in the late 1970s to reevaluate the distribution of  $^{137}\text{Cs}$  and to document levels of plutonium in the Clinch River sediments near the site proposed for the Clinch River Breeder Reactor (Oakes et al. 1982). Those results indicated that much of the  $^{137}\text{Cs}$  previously deposited in the Clinch River had been eroded from the river sediments and transported downstream. Oakes et al. (1982) also reported that  $^{239,240}\text{Pu}$  activities in the sediment were as high as 2 pCi/g (75 mBq/g) in the Clinch River near the proposed reactor site.

To document levels of contamination in the sediments and soils near the proposed construction site of the New Blair Road Bridge across Poplar Creek, Olsen and Cutshall (1985) measured the vertical distribution of  $^{137}\text{Cs}$ , Hg, and  $^{238}\text{U}$  in a sediment core collected within the creek and in a soil core collected on its floodplain. Contaminant concentrations in the Poplar Creek sediment core are presented in Table 2 and indicate that Hg levels exceeded 450  $\mu\text{g/g}$ . Olsen and Cutshall (1985) attributed this high Hg concentration to discharges from the Y-12 facility via the EFPC. In addition, Olsen and Cutshall (1985) suggested that the Y-12 facility may also be a source of uranium to off-site areas because this sediment core was collected upstream of any ORGDP discharge sites to Poplar Creek.

Table 2. Vertical distribution of  $^{137}\text{Cs}$ , mercury, and uranium in a Poplar Creek sediment core collected near Blair Road Bridge

Sample depth (cm)	Organic carbon (%)	Mercury ( $\mu\text{g/g}$ )	$^{137}\text{Cs}$ (pCi/g)	$^{238}\text{U}$ (pCi/g)
0-2	1.5	6.3	$1.11 \pm 0.03$	$\leq 2.8$
2-4	2.4	4.2	$1.26 \pm 0.03$	$\leq 2.8$
4-8	2.5	2.2	$1.07 \pm 0.02$	$3.0 \pm 1.1$
8-12	1.7	5.6	$0.33 \pm 0.02$	$\leq 2.8$
12-16	1.6	6.8	$0.23 \pm 0.01$	$3.5 \pm 0.9$
16-20			$0.18 \pm 0.01$	$\leq 2.8$
20-24			$0.30 \pm 0.04$	$\leq 2.8$
24-28			$0.34 \pm 0.04$	$4.1 \pm 2.3$
28-32			$0.38 \pm 0.05$	$\leq 2.8$
32-36	1.3	14.0	$0.79 \pm 0.06$	$\leq 2.8$
36-40	1.3	22.6	$2.63 \pm 0.11$	$\leq 2.8$
40-44			$1.33 \pm 0.08$	$\leq 2.8$
44-48			$0.68 \pm 0.05$	$8.3 \pm 2.6$
48-52	1.6	18.0	$0.90 \pm 0.07$	$\leq 2.8$
52-56			$1.33 \pm 0.08$	$12.2 \pm 4.0$
56-60			$1.10 \pm 0.08$	$\leq 2.8$
60-64	1.4	38.3	$0.82 \pm 0.04$	$7.5 \pm 2.5$
64-68	0.7	54.4	$1.33 \pm 0.08$	$10.2 \pm 2.9$
68-72			$0.87 \pm 0.07$	$4.3 \pm 5.9$
72-76			$1.08 \pm 0.08$	$29.8 \pm 5.3$
76-80			$1.01 \pm 0.06$	$15.5 \pm 2.5$
80-84	1.1	460.0	$1.06 \pm 0.07$	$8.8 \pm 3.2$
84-88	1.1	220.0	$1.53 \pm 0.08$	$8.0 \pm 3.4$
88-92	0.9	40.0	$1.71 \pm 0.08$	$3.8 \pm 2.2$
92-96	1.0	56.0	$4.64 \pm 0.13$	$7.4 \pm 3.1$
96-98			$2.81 \pm 0.11$	$\leq 2.8$

Source: Olsen and Cutshall 1985.

Before uranium enrichment operations at ORGDP were halted, Ashwood et al. (1986) collected approximately 180 surface sediment samples and three sediment cores from the Poplar Creek and Clinch River system to identify contaminant source areas around the ORGDP facility. Contaminant concentration levels in the three sediment cores are illustrated in Fig. 3. From these data, Ashwood et al. (1986) concluded that Poplar Creek sediments upstream of the ORGDP facility were contaminated with Hg, uranium, and  $^{60}\text{Co}$  and suggested that the Y-12 plant was a significant source of the Hg and uranium contamination and that releases from the Oak Ridge Sewage Treatment Facility were responsible for the  $^{60}\text{Co}$ . They also indicated that inputs of  $^{137}\text{Cs}$  and  $^{60}\text{Co}$  to off-site areas from the Y-12 Plant and from the City of Oak Ridge Sewage Treatment Plant via EFPC were relatively insignificant compared with to the release of these two radionuclides from ORNL via WOL. As a consequence, much of the  $^{137}\text{Cs}$  and  $^{60}\text{Co}$  in the sediments near ORGDP were introduced via the Clinch River during periods of backflow into Poplar Creek.

The declassification of information on Hg discharged and unaccounted for from the Y-12 Plant in 1983 led to increased scrutiny of downstream areas for Hg contamination (Elwood 1984) and to the organization of an interagency task force [Oak Ridge Task Force (ORTF)] to evaluate the associated threats of off-site contamination to human health, fish, and wildlife. Most of the ORTF investigative efforts were focused on the Hg contamination of EFPC and its floodplain. A total of 1526 water, sediment, and aquatic biota samples were collected by the Tennessee Valley Authority (TVA) to assess off-site mercury contamination derived from the Y-12 releases (TVA 1986). This ORTF-supported study indicated that about 170,000 lb (75 metric tons) of Hg had accumulated in the EFPC floodplain and that about 500 lb (0.2 metric tons) were annually exported from EFPC to off-site areas.

In another ORTF-supported study, Turner et al. (1985) collected a total of seven sediment cores from Watts Bar and Chickamauga reservoirs to determine the downstream extent of the Hg contamination. They found that concentrations of Hg and  $^{137}\text{Cs}$  were strongly correlated in sediment cores collected in Watts Bar Reservoir, exhibiting a peak concentration

## RADIONUCLIDE, ORGANIC AND METAL PROFILES IN SEDIMENT CORES

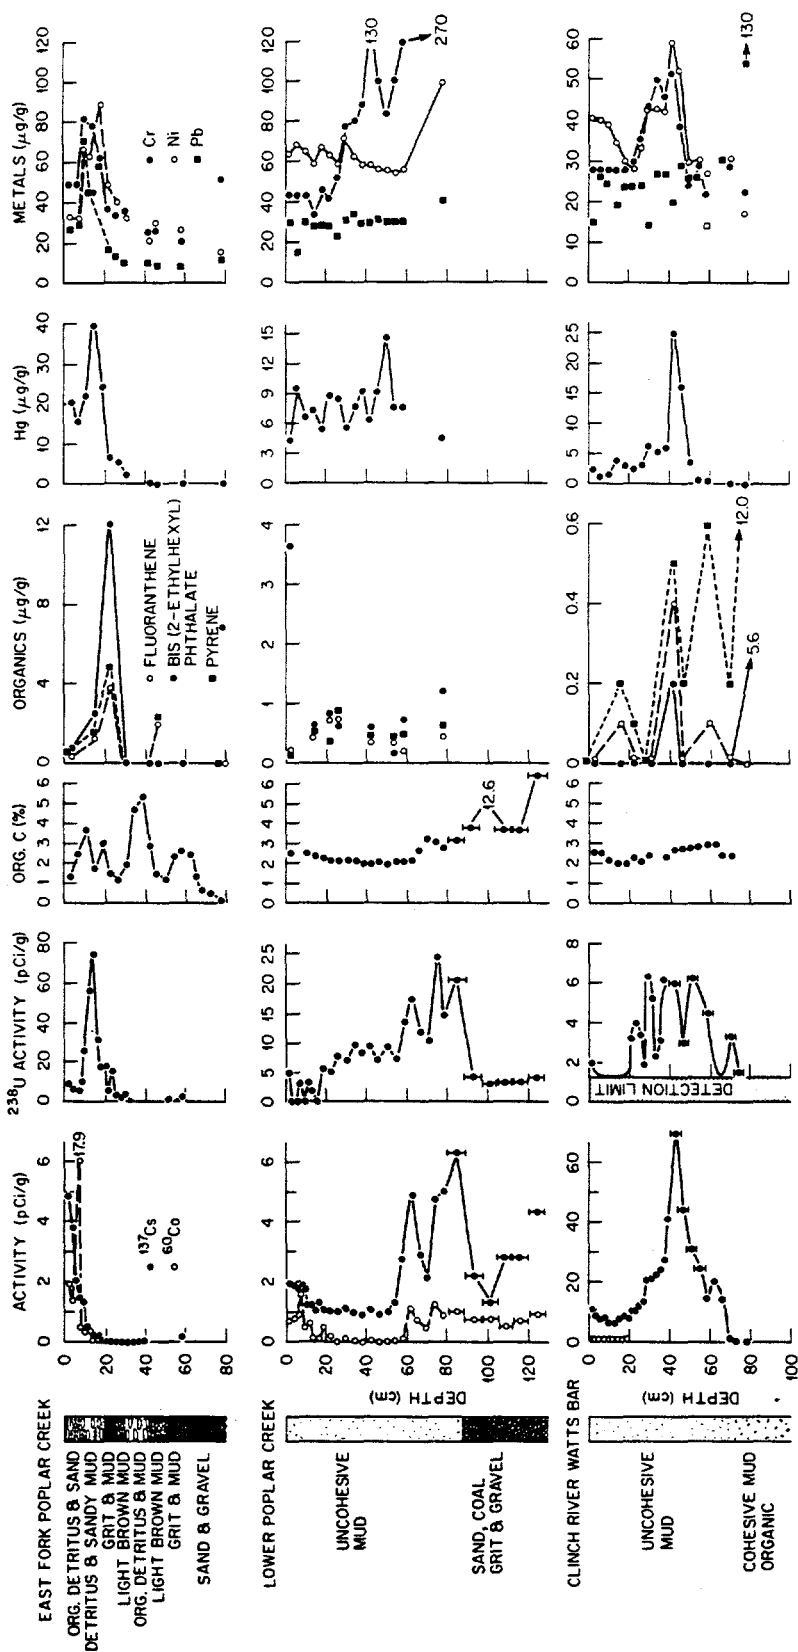


Fig. 3. Vertical distribution of  $^{137}\text{Cs}$ , mercury, uranium, and several other contaminants in (1) a sediment core collected at the junction of East Fork Poplar Creek and Poplar Creek, (2) a sediment core collected in Poplar Creek just downstream of ORGDP, and (3) a sediment core collected near the mouth of the Clinch River at Kingston. (Source: Ashwood et al. 1986.)



at sediment depths ranging from about 40 to 100 cm (Fig. 4). The highest concentrations of Hg ( $47 \mu\text{g/g}$ ) and of  $^{137}\text{Cs}$  ( $152 \text{ pCi/g}$ ) were found to occur in the core CRM-1, obtained at the mouth of the Clinch River near Kingston, Tennessee (Fig. 4). Sediment cores collected from the lower Chickamauga Reservoir, however, contained Hg profiles that were more complex (in part a result of additional Hg inputs to the reservoir from a chloralkali plant located on the Hiwassee River) but contained  $^{137}\text{Cs}$  profiles that were very similar to those in Watts Bar Reservoir (Turner et al. 1985).

On the basis of the results presented in Turner et al. (1985) and in Ashwood et al. (1986) and because most of the previous studies have been focused on the transport and fate of contaminants in EFPC, Poplar Creek, and the Clinch River downstream from the ORR, a need existed for a thorough sampling of Watts Bar Reservoir. All of the above previous studies have clearly shown that Poplar Creek and the Clinch River serve as pipelines for contaminants released from the ORR and that Watts Bar Reservoir serves as the major zone for contaminant accumulation. This conclusion is consistent with work in other river-reservoir systems, which have also indicated that reservoirs are very efficient traps for riverborne particles, nutrients, and contaminants and are sites of rapid sediment and contaminant accumulation (Dendy et al. 1973; Ritchie, Hawks, and McHenry 1975; Olsen et al. 1981; Kimmel and Groeger 1986; Olsen et al. 1989a).

To address this need for characterizing the nature and extent of contamination in Watts Bar Reservoir, we have measured the vertical distribution of  $^{137}\text{Cs}$  in more than 60 sediment cores (Fig. 5) and the concentration of  $^{137}\text{Cs}$  in more than 190 surface sediment samples (Fig. 6) collected from Watts Bar Reservoir. The surface sediment samples were used to develop a map of sediment characteristics (Fig. 7) and to identify sites best suited for sediment coring. The objectives of this scoping study were to (1) use  $^{137}\text{Cs}$  to evaluate the extent of contaminant accumulation in the reservoir sediments, (2) preliminarily identify highly contaminated off-site areas that could constitute potential risks to human health or the environment, and (3) estimate the

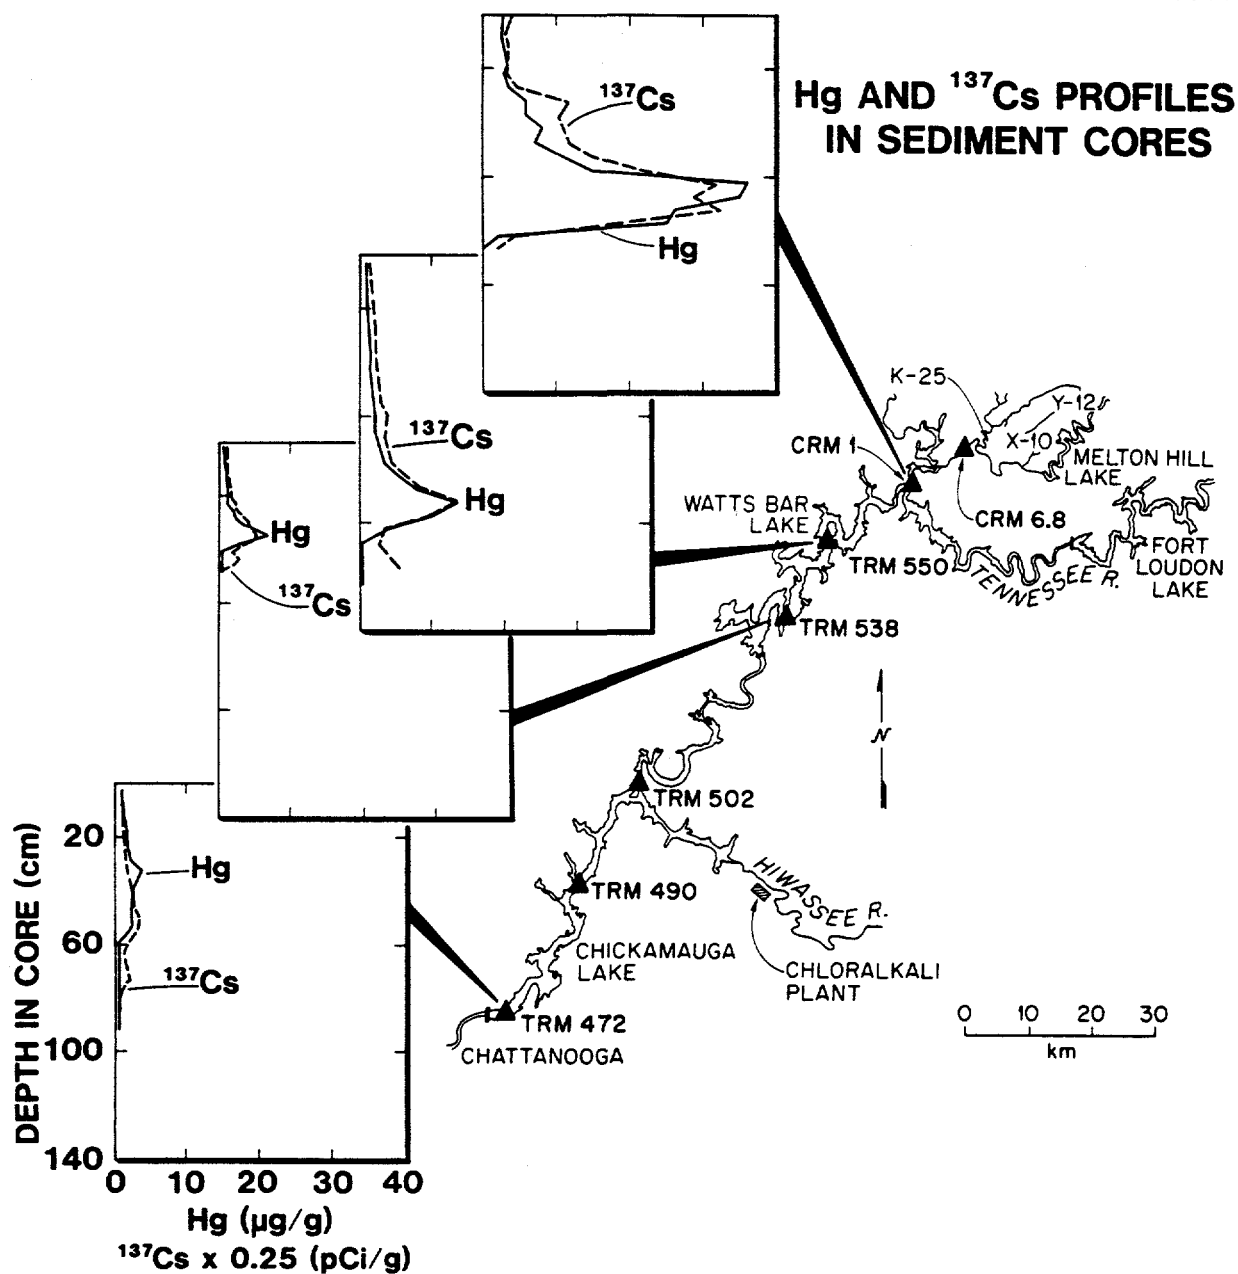


Fig. 4. Vertical profiles of  $^{137}\text{Cs}$  and mercury for selected sediment cores collected in the Tennessee River Reservoir system. (Source: Turner et al. 1985.)



ORNL-DWG 90-1971

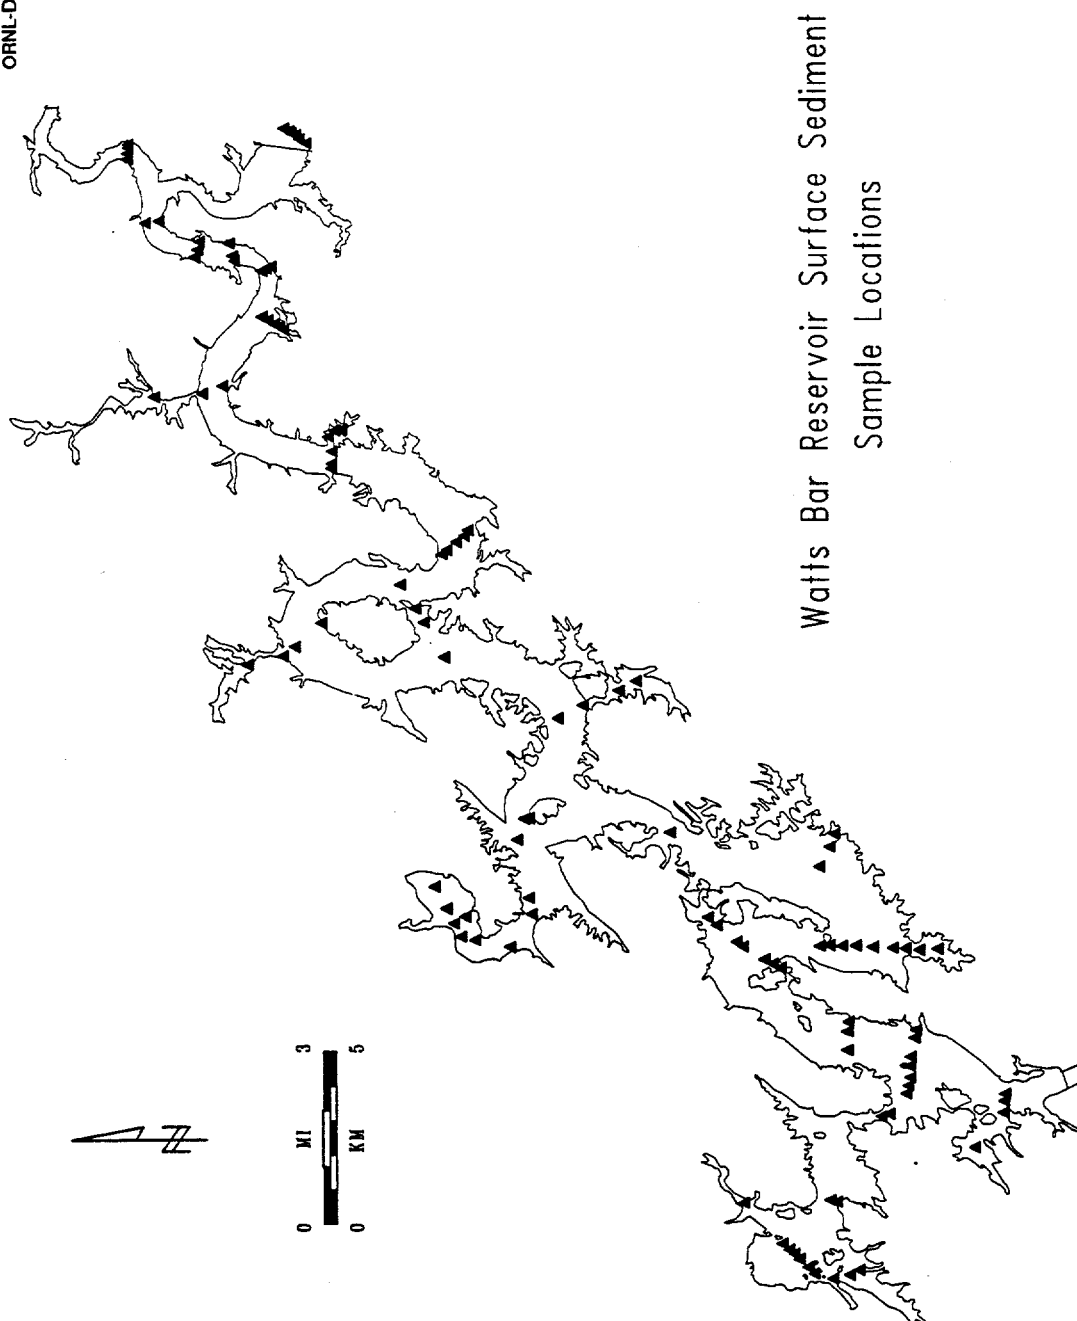


Fig. 6. Map of Watts Bar Reservoir indicating the locations of the surface grab samples collected in this study.

ORNL-DWG 90-1972

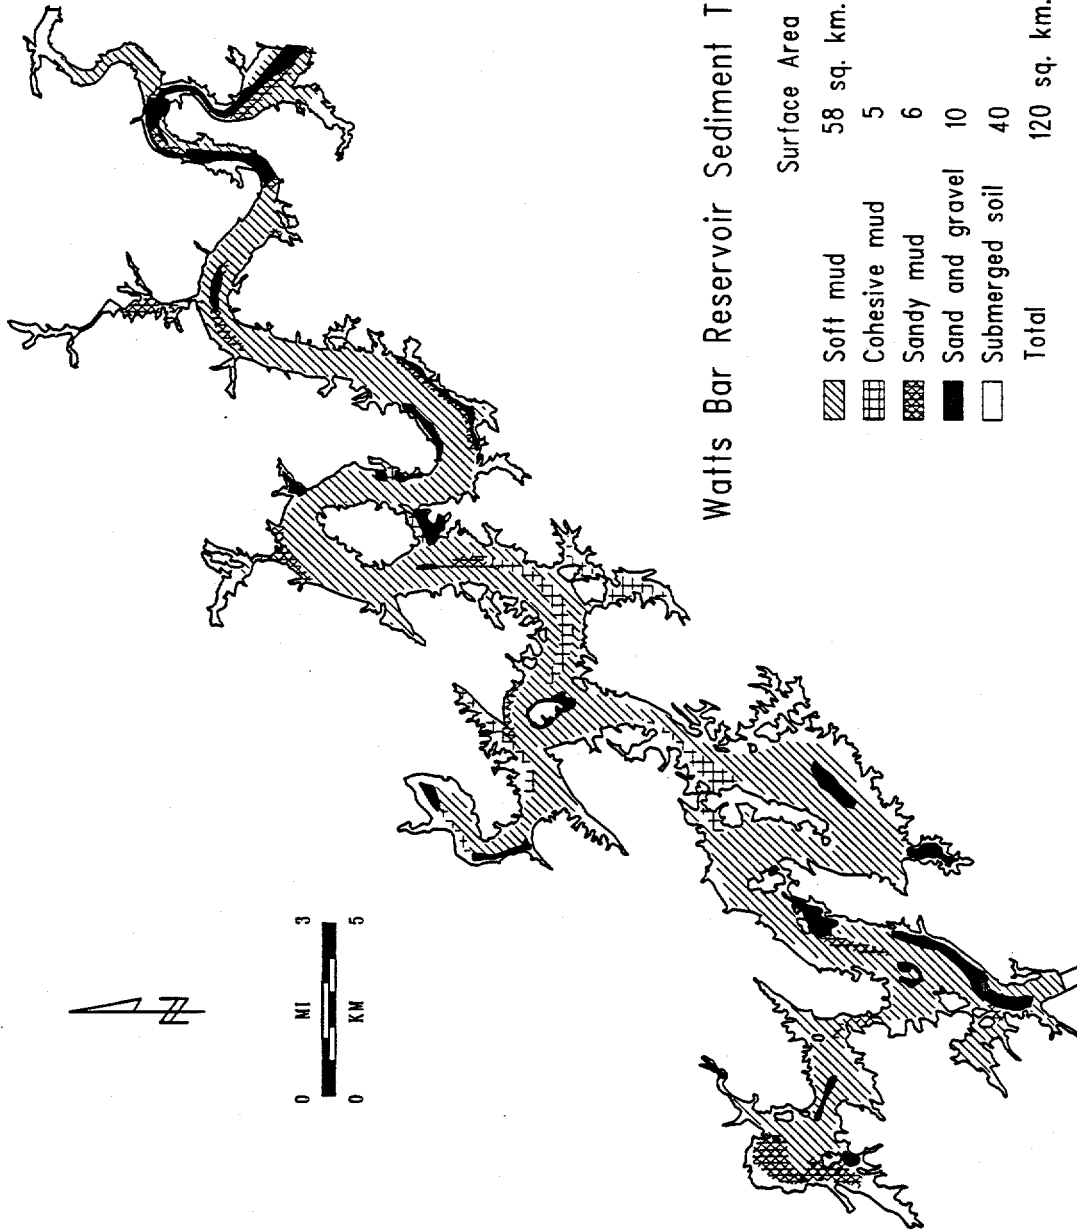


Fig. 7. Map of the surface sedimentary characteristics based on the visual textural analysis of more than 190 surface sediment samples collected in Watts Bar Reservoir.

retention efficiency of the reservoir for  $^{137}\text{Cs}$  and, thereby, for other particle-associated contaminants.

As stated previously, this work represents the initial phase of the Clinch River RFI and provides important information for characterizing the nature and extent of ORR-derived contamination in off-site areas.

### MATERIALS AND METHODS

Sampling locations in the Clinch River and Tennessee River system were identified using TVA Navigation Charts with corresponding shore markers and/or channel buoys. In addition, prominent shore features (e.g., TVA power lines, bridges, and barge moorings) were logged for each sampling location. Surface sediment samples were collected using a Ponar bottom-grab sampler (17 x 10 x 7 cm). The retrieved surface grab samples were immediately placed into labeled Marinelli Beakers, which were placed directly on gamma detectors for radionuclide ( $^{137}\text{Cs}$ ) analysis. These samples were used to characterize sediment types and distributions (gravel, sand, mud, and soil detritus) and to develop a map of surfacial contaminant concentrations.

Two types of coring devices were also used to obtain sediment profiles: a gravity corer and a vibracorer. The free-fall gravity corer (Wildco KB) was equipped with a plastic liner that was 120-cm long and 4.7 cm in diameter. The corer was attached to a cable on a reel and allowed to free-fall during descent. This coring device was primarily used in areas where the reservoir water depths was greater than 10 m. Upon retrieval, the plastic liner containing sediment was capped and then removed from the core barrel. The core was extruded from the liner and sectioned into either 1-, 2-, or 4-cm depth increments. These sections were sealed into plastic-lined aluminum cans and returned to the laboratory for radionuclide analysis.

The vibracorer consists of a vibrating head attached to an aluminum irrigation pipe, typically 7.2 cm in diameter. The vibrating head allows for greater penetration of the core pipe by thixotropic action. Sediment penetration by vibracoring is usually much greater

than that obtainable by gravity coring and also minimizes compression of the sediment during sampling. Because pipe lengths greater than the depth of the water column are required in this operation, vibracores were collected only in areas where the water depth was less than 10 m. After penetration into the sediment, the top of the core was plugged, and the entire core pipe was brought to the surface. The bottom was then plugged, and the excess core pipe was removed to facilitate handling and sediment extrusion. During extrusion the sediment core was sectioned into either 2- or 4-cm depth increments and sealed into labeled aluminum cans, as described previously.

#### SEDIMENT ANALYSES

Initially, the sediment samples collected in off-site areas were analyzed and screened for  $^{137}\text{Cs}$  in our laboratory by gamma spectrometry. A few selected samples were also analyzed for  $^{60}\text{Co}$  and naturally occurring  $^{210}\text{Pb}$ , which was used to estimate sediment accumulation rates and to determine the age of the sediments.

The samples were radiochemically analyzed using either Ge (Li) or Ge (IG) solid state detectors. A Nuclear Data 6700 microprocessor and later a Nuclear Data 9900 microprocessor acquisition system with spectra acquired in 4096 channels were used to record  $^{137}\text{Cs}$  decays. Counting times for each sample ranged from 60 to 1000 min or longer, depending on the activity level present and the degree of precision desired.

Each detector used for the initial screening was calibrated for photon energy vs channel number using isotopes of known gamma-ray energy (i.e.,  $^{133}\text{Ba}$ ,  $^{137}\text{Cs}$ , and  $^{60}\text{Co}$ ). Efficiency calibrations for the various geometries were performed using National Bureau of Standards (NBS) reference sources (i.e., Amersham's QCY 46 mixed gamma solution). A description of the calibration procedures has been presented elsewhere (Larsen and Cutshall 1981). After counting, the sample was weighed, oven-air dried ( $60^\circ\text{C}$ ) for several days, and weighed again to determine both the wet and dry weight. The  $60^\circ\text{C}$  drying temperature was selected to prevent volatilization of other types of contaminants (e.g., Hg and PCBs.) Wet and dry weights of the samples were used to calculate porosity and activity concentrations.

Various techniques were used to provide quality assurance/quality control for the radionuclide measurements. Detector performance was evaluated weekly by counting a source of known activity and comparing the value obtained with the reported value. These values were then plotted on a control chart to keep a track record of detector performance. In addition, we participated routinely with the U.S. Environmental Protection Agency's Quality Assurance/Quality Control Radioanalytical Program at Las Vegas, Nevada. Samples received from the program are routinely analyzed by gamma ray spectrometry as cross-checks or blind samples. Table 3 illustrates the performance for each of our three detectors (A, B, and C) in the April 20, 1987 laboratory intercomparison. In addition, certified reference materials from the NBS were also analyzed. Table 4 illustrates the analysis of NBS SRM 4353 Rocky Flats Soil contained in our aluminum can geometry.

After initial screening by gamma spectrometry, selected samples (hermetically sealed in plastic-lined aluminum cans) were sent, through an appropriate chain of custody, to the ORNL Analytical Chemistry Division (ACD) for analysis of total Hg using ACD Preparation Method 10915 and ACD Analytical Method 1214922. In addition to routine quality assurance/quality control procedures used by the ACD, a standard reference material (NBS SRM 1646, Estuarine Sediment) was analyzed with one batch of core samples. The results (0.065 and 0.067  $\mu\text{g/g}$ , respectively, for the two duplicates) were in good agreement with the certified value ( $0.063 \pm 0.012 \mu\text{g/g}$ ) for this material.

The vertical distribution of  $^{90}\text{Sr}$  was also measured in one of the sediment cores (Core 567.5 in Fig. 5) collected at the mouth of the Clinch River near Kingston. The samples were radiochemically analyzed following the procedures established at the DOE Environmental Measurements Laboratory (E-SR-01). A  $^{85}\text{Sr}$  tracer was added to each sediment sample for yield determinations. The  $^{90}\text{Sr}$  activity was measured with a low-background gas-flow proportional beta counter, and accuracy was assessed with a  $^{90}\text{Sr}$  standard supplied by the U.S. Environmental Protection Agency.



Table 3. Environmental Protection Agency's EMSL-LV Intercomparison Study,  
 April 1987, Marinelli Beaker geometry  
 (pCi/L  $\pm 1\sigma$ )

	ESD A	ESD B	ESD C	ESD mean	EPA value	Mean all labs
<sup>60</sup> Co	8.0	8.0	7.0	7.7 $\pm$ 0.6	8.0 $\pm$ 5.0	9.0 $\pm$ 2.0
<sup>134</sup> Cs	18.0	18.0	16.0	17.3 $\pm$ 1.2	20.0 $\pm$ 5.0	18.2 $\pm$ 2.6
<sup>137</sup> Cs	15.0	15.0	14.0	14.7 $\pm$ 0.6	15.0 $\pm$ 5.0	15.7 $\pm$ 2.2

Table 4. National Bureau of Standards Reference Material 4353 Rocky Flats  
Soil, aluminum can geometry<sup>a</sup>  
(pCi/g  $\pm 1\sigma$ )

	ESD Det. A	ESD Det. B	ESD Det. C	ESD mean	NBS NBS value
Cs-137	0.46 $\pm$ 0.03	0.45 $\pm$ 0.05	0.49 $\pm$ 0.04	0.47 $\pm$ 0.02	0.48 $\pm$ 0.01
K-40	18.8 $\pm$ 0.4	18.6 $\pm$ 0.5	19.4 $\pm$ 0.6	18.9 $\pm$ 0.6	19.5 $\pm$ 0.6

<sup>a</sup>Decay corrected to Dec. 15, 1980.

Relationship of  
collection location  
to bottom  
sediment?

## WATER ANALYSES

To quantify the distribution of  $^{137}\text{Cs}$  and Hg between dissolved and particulate phases, several large-volume (400- to 800-L) water samples were collected at various locations in Watts Bar Reservoir. Suspended particles ( $>0.45\ \mu\text{m}$ ) were removed from these large-volume samples by continuous-flow centrifugation. The suspended matter was dried, weighed, and analyzed for  $^{137}\text{Cs}$  by the procedures described previously herein and analyzed for total Hg by the ACD.

After centrifugation, each large-volume water sample was acidified with HCl to a pH of approximately 2, and stable Cs and Fe (and occasionally Pb, Co, Be, and  $^{242}\text{Pu}$ ) were added as carriers and yield tracers. The yield tracers were allowed to equilibrate for 6 to 8 h, and dissolved radiocesium was removed from the large-volume water sample by sorption on a cation-exchange resin (ammonium molybdophosphate). The resin was added on the same day of sample collection and was allowed to settle out of the sample overnight. For selected samples the water was then transferred to another 1000-L tank, and the pH was adjusted to about 10 with NaOH to allow the iron to precipitate. Dissolved  $^{60}\text{Co}$ ,  $^7\text{Be}$ ,  $^{210}\text{Pb}$ , and plutonium isotopes were removed from these samples by coprecipitation with or sorption on the  $\text{Fe}(\text{OH})_3$  precipitate. Quantification of the yield tracers by atomic absorption spectrometry indicated that 70 to 100% of the Cs, Be, Pb, and Co could be recovered by these procedures. The radionuclide activities for each sample were yield corrected according to the actual recovery.

The dissolved and particulate plutonium analyses were conducted by M. Thein (ORNL Environmental Compliance and Health Protection Division). These analyses involved dissolution with HCl, coprecipitation with calcium oxalate, radiochemical separation with ion-exchange columns, electrodeposition onto stainless steel disks, and alpha spectrometry with silicon surface-barrier detectors. The samples were alpha counted for about 21 d, and yields were evaluated using a  $^{242}\text{Pu}$  tracer. Plutonium-239 and -240 activities are collectively reported because the energies of the alpha particles produced by the decay of  $^{240}\text{Pu}$  (6580-year half-life) cannot be resolved from those produced by the decay of  $^{239}\text{Pu}$  (24,400-year half-life) by alpha spectrometry.

Two 500-mL water samples were collected at the same time and at two locations in Watts Bar Reservoir to measure the concentration of dissolved Hg in the water column. These samples were filtered through 0.2- $\mu$ m filters, and the filtrates were analyzed for total Hg by the ACD.

## RESULTS AND DISCUSSION

Some contaminants and radionuclides (such as  $^3\text{H}$ ,  $^{90}\text{Sr}$ , and  $^{131}\text{I}$ ) are relatively soluble in freshwater systems, and consequently their transport and biogeochemical fate are mediated by water movements and biological uptake from the water phase. Most contaminants (e.g., Hg,  $^{137}\text{Cs}$ ,  $^{60}\text{Co}$ , and  $^{239,240}\text{Pu}$ ), however, are chemically and biologically reactive and rapidly become associated with particles in freshwater systems. Consequently, the transport and biogeochemical fate of these contaminants are primarily governed by particle dynamics.

The tendency for a contaminant to become associated with particles in aquatic systems is expressed quantitatively by a value or distribution coefficient ( $K_d$ ), defined as

$$K_d = \frac{C_p}{C_w} ,$$

where  $C_p$  is the concentration of a specific contaminant associated with a given weight of particles ( $\mu\text{g/g}$ ) and  $C_w$  is the concentration of the contaminant in an equal weight of water ( $\mu\text{g/mL}$ ). Ideally, this ratio is a measure of the reversible equilibrium partitioning of a contaminant between dissolved and particulate phases and would be a constant. Because most natural environments (including Watts Bar Reservoir) are affected by short-term physical, chemical, and biological processes, chemical equilibrium is continually adjusting and rarely attained.

## CONTAMINANTS IN THE WATER COLUMN

Dissolved and particulate concentrations for Hg,  $^{137}\text{Cs}$ ,  $^{60}\text{Co}$ ,  $^7\text{Be}$ ,  $^{239,240}\text{Pu}$ , and  $^{238}\text{Pu}$  in the water column of Watts Bar Reservoir and their calculated particle-to-water distribution coefficients are listed in Table 5. The particle-to-water distribution coefficients for both  $^{137}\text{Cs}$  and Hg range between  $1 \times 10^5$  to  $5 \times 10^5$  (Table 5). This indicates that both contaminants are particle-reactive and that the dissolved concentrations of  $^{137}\text{Cs}$  and Hg are about 10,000 times lower than the concentration on suspended particles and surface sediments.

The data presented for the large-volume water samples collected at the mouth of the Clinch River on December 1, 5, and 17, 1986 (Table 5) were obtained to (1) provide information on the partitioning of these contaminants between dissolved and particulate phases and (2) determine whether the abnormally high concentrations of  $^{60}\text{Co}$  that were measured by others in WOL on November 25-26, 1986, could be traced into Watts Bar Reservoir.

On December 1, the dissolved concentration of  $^{60}\text{Co}$  was 0.024 pCi/L (0.9 mBq/L) near Kingston City Park, and the concentration of  $^{60}\text{Co}$  on the suspended matter was 1.1 pCi/g (41 mBq/g) (Table 5). Because the  $^{60}\text{Co}$  concentration on bottom sediments in this area ranges from about 0.8 to 1.2 pCi/g (30 to 45 mBq/g), the  $^{60}\text{Co}$  concentration measured on the suspended matter (1.1 pCi/g) is typical for resuspended bottom sediments and does not reflect any recent additional inputs. Likewise, the concentrations of  $^{137}\text{Cs}$ , Hg, and plutonium in the water and on the suspended matter were not abnormally higher than the values expected from the resuspension of river-reservoir sediments, primary productivity, and equilibrium particle-to-water distributions.

On December 5 (about 10 d after the  $^{60}\text{Co}$  release was observed in WOL), the dissolved concentration of  $^{60}\text{Co}$  increased by an order of magnitude and particulate concentrations of  $^{60}\text{Co}$  increased by a factor of 4 (Table 5). On December 17, the dissolved concentration of  $^{60}\text{Co}$  began to decrease but particulate  $^{60}\text{Co}$  concentrations continued to increase by another factor of 2 (Table 5). These data indicate that it takes about 2 to 3 weeks before the  $^{60}\text{Co}$  released into White Oak Creek is transported via the Clinch River into Watts Bar Reservoir. In

Table 5. Contaminant distributions between aqueous and particulate phases

Date	Nuclide	Suspended load (mg/L)	Dissolved (fCi/L)	Particulate (pCi/g)	Distribution <sup>a</sup> K <sub>d</sub>
<u>Kingston City - Mouth of Clinch River</u>					
12/1/86	<sup>60</sup> Co	14	24	1.1	5 x 10 <sup>4</sup>
	<sup>137</sup> Cs		35	6.8	2 x 10 <sup>5</sup>
	<sup>7</sup> Be		92	5.4	6 x 10 <sup>4</sup>
	<sup>239,240</sup> Pu		0.38	0.04	1 x 10 <sup>5</sup>
	<sup>238</sup> Pu		0.11	0.005	5 x 10 <sup>4</sup>
12/5/86	<sup>60</sup> Co	11	250	4.3	2 x 10 <sup>4</sup>
	<sup>137</sup> Cs		49	14.6	3 x 10 <sup>5</sup>
	<sup>7</sup> Be		65	5.3	8 x 10 <sup>4</sup>
	Hg (ppb) <sup>b</sup>		0.005	2360	5 x 10 <sup>5</sup>
12/17/86	<sup>60</sup> Co	7	215	7.3	3 x 10 <sup>4</sup>
	<sup>137</sup> Cs		103	26.5	3 x 10 <sup>5</sup>
	<sup>7</sup> Be		76	8.0	1 x 10 <sup>5</sup>
<u>Thieves Neck - Watts Bar Reservoir</u>					
12/22/86	<sup>60</sup> Cs	7	12	0.9	8 x 10 <sup>4</sup>
	<sup>137</sup> Cs		17	5.1	3 x 10 <sup>5</sup>
	<sup>7</sup> Be		78	8.7	1 x 10 <sup>5</sup>
<u>Whites Creek Mouth - Watts Bar Reservoir</u>					
3/9/89	Hg (ppb)	21	0.004	510	1 x 10 <sup>5</sup>

<sup>a</sup>Particle-to-water distribution
 $K_d$  = concentration per kilogram of particles.  
concentration per liter of water
<sup>b</sup>ppb = parts per billion or  $\mu\text{g/L}$ .

addition, the time-delayed increase in the particulate  $^{60}\text{Co}$  and  $^{137}\text{Cs}$  concentrations at Kingston (Table 5) imply that particle deposition and resuspension processes cause the maximum water column concentration of particle-reactive radionuclides to occur at Kingston about 1 month after release into WOL. This delay may be even longer during the summer and fall, when rainstorm resuspension events occur less frequently.

Comparison of the suspended-particulate  $^{137}\text{Cs}$  and Hg concentration data measured at the mouth of the Clinch River with respective data collected at Thieves Neck and Whites Creek (Table 5) indicate that the concentrations for both of these contaminants are reduced by a factor of about 3. This decrease is also apparent in the  $^{137}\text{Cs}$  and Hg concentrations in surface sediments (Appendix A). Concentrations of  $^{137}\text{Cs}$  in soft-mud surface sediments at the mouth of the Clinch River average about 7.0 pCi/g (260 mBq/g), whereas  $^{137}\text{Cs}$  concentrations in soft-mud surface sediments below the confluence of the Tennessee River average about 2.5 pCi/g (90 mBq/g). This trend probably reflects the dilution of Clinch River particulate material with particles from other sources (primarily the Tennessee River). but dissolved Hg conc is ~ =

Finally, it should be noted that concentrations of  $^{239,240}\text{Pu}$  and  $^{238}\text{Pu}$  in the water column of Watts Bar Reservoir near Kingston are also reported in Table 5. These dissolved and particulate plutonium concentrations are about half an order of magnitude higher than respective concentrations that have been measured by us and others in other river-reservoir systems along the east coast of the United States, including the Savannah River downstream from the DOE Savannah River Plant (Olsen et al. 1989b). In addition, the ratio of  $^{238}\text{Pu}$  to  $^{239,240}\text{Pu}$  on the suspended particles in Watts Bar Reservoir (0.13) is about a factor of 3 higher than the  $^{238}\text{Pu}$  to  $^{239,240}\text{Pu}$  ratio in global fallout (0.045) delivered to mid-latitude areas of the Northern Hemisphere. This suggests that some of the plutonium disposed of or stored on the ORR is being transported into off-site areas.

#### CONTAMINANTS IN BOTTOM SEDIMENTS

Sorption onto suspended particles and sediment deposition are the principal mechanisms by which many chemically reactive contaminants

(such as  $^{137}\text{Cs}$  and Hg) are removed from the water column and accumulated in the bottom sediments. Although burial in sediments helps to isolate these contaminants from human and biotic contact, contaminant burial may be disturbed in some areas by sediment resuspension, sediment mixing, or diagenetic remobilization processes. Unfortunately, however, quantitative measurements of the extent of removal, burial, and remobilization in any field system are extremely difficult because of the complex physical, chemical, and biological interactions that affect contaminant fate and their extreme variability with space and time. One of the tools available for tracing and quantifying these interactions is the distribution of a radionuclide with a known source and history of input into the system. In this scoping study, we have used the distribution of  $^{137}\text{Cs}$  as a cost-effective tracer to identify where sediments and particle-reactive contaminants are accumulating in the Clinch River and Watts Bar Reservoir system. This approach will allow for more-efficient characterization of contamination in off-site areas and, therefore, reductions in time and costs.

#### RADIONUCLIDE DISTRIBUTIONS

The distribution of  $^{137}\text{Cs}$  concentrations in the surface sediments of Watts Bar Reservoir is illustrated in Fig. 8. A comparison of this figure with the map of sedimentary characteristics (Fig. 7) indicates that the concentrations of  $^{137}\text{Cs}$  are highest in the soft-mud areas and lowest in the sand/gravel and submerged soil areas of the reservoir.

The vertical distribution of  $^{137}\text{Cs}$  in Watts Bar Reservoir sediment cores is strongly correlated with the historical record of  $^{137}\text{Cs}$  discharges from WOL, exhibiting a large subsurface peak coincident with the draining of WOL in the mid-1950s (Fig. 9). The depth of this subsurface peak and the thickness of  $^{137}\text{Cs}$ -contaminated sediment vary with the rate of sediment accumulation. In areas of rapid sediment accumulation, such as in the upper portion of the reservoir (Core 567.5 in Fig. 9) and along the old river channel (Cores 6-2-1, 8-1-4, and 9-4-3 in Fig. 9), the highest  $^{137}\text{Cs}$  concentrations occur at sediment depths as great as 80 cm below the surface. In areas of slower sediment accumulation, such as along the reservoir margins (Cores KCP, 8-2-3 and



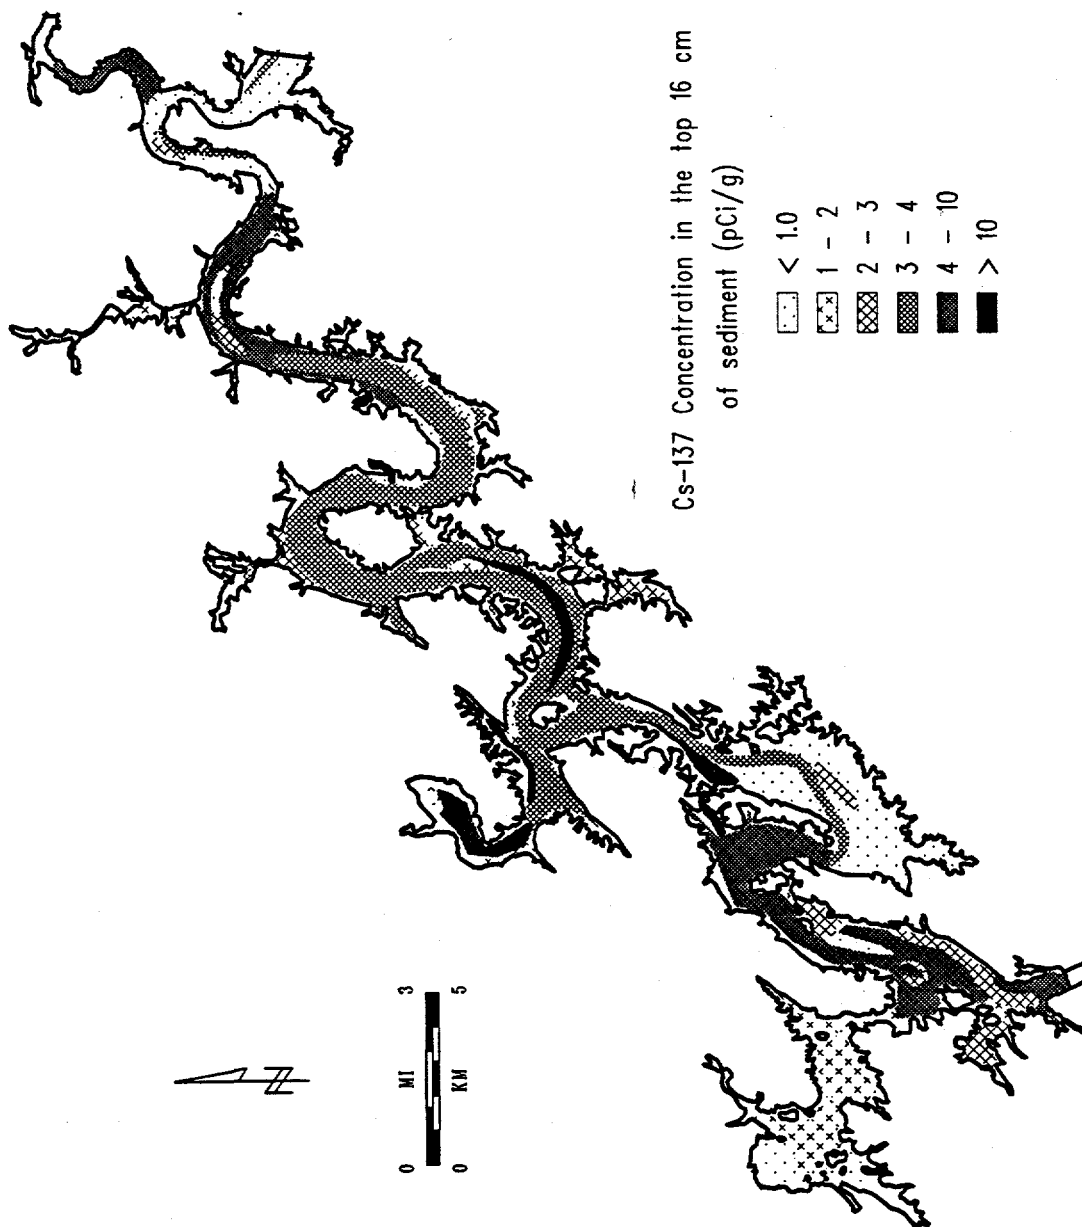


Fig. 8. Map of Watts Bar Reservoir illustrating the average  $^{137}\text{Cs}$  concentration (pCi/g) in the top 16 cm of sediment.

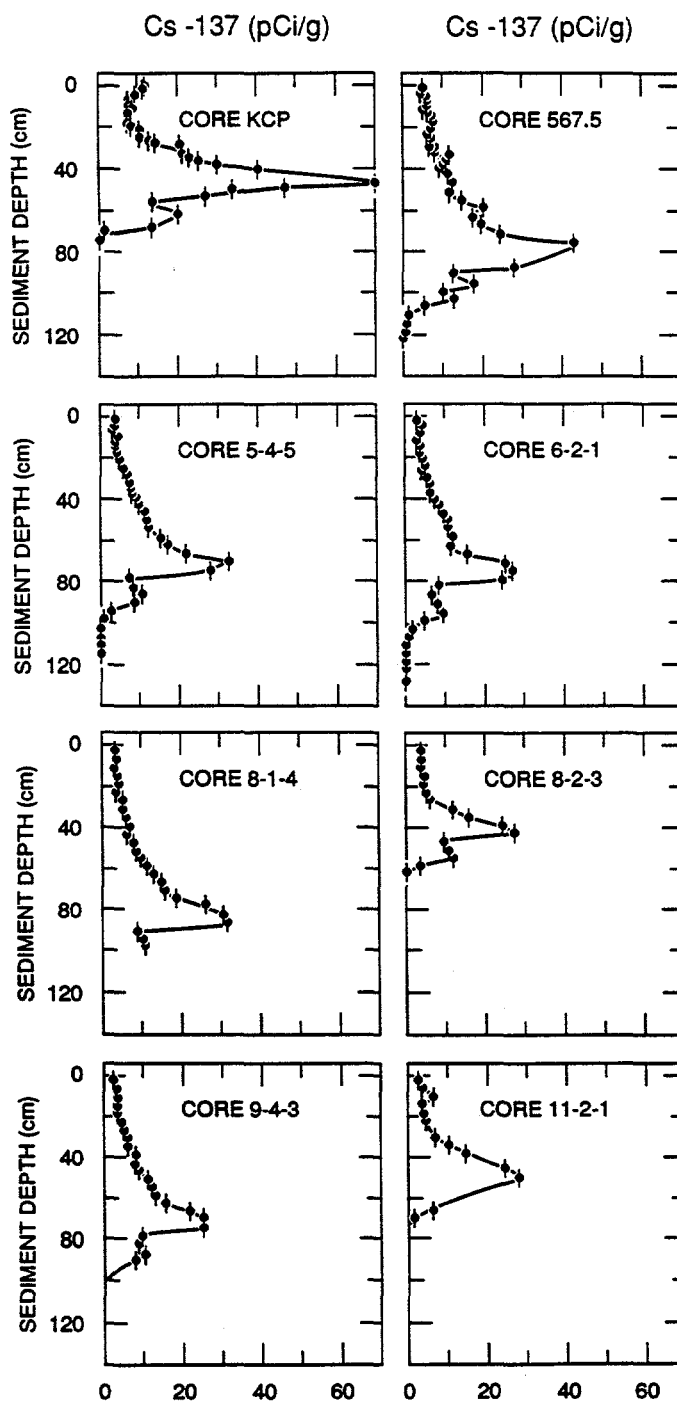


Fig. 9. Vertical distribution of  $^{137}\text{Cs}$  with sediment depth in cores KCP, 567.5, 5-4-5, 6-2-1, 8-1-4, 8-2-3, 9-4-3, and 11-2-1. Cores KCP and 567.7 were collected near the mouth of the Clinch River, and the others were collected in a downstream sequence to Watts Bar Dam (see Fig. 5 for core locations).

11-2-1 in Fig. 9), the highest  $^{137}\text{Cs}$  concentrations can often occur much nearer the sediment surface.

To document the fact that the  $^{137}\text{Cs}$  peak in Watts Bar Reservoir sediments actually reflects the draining of WOL in the mid-1950s, the rate of sediment accumulation (and thus the age of the sediment at various depths) was independently determined using the  $^{210}\text{Pb}$  chronological technique. Lead-210 is a naturally occurring radionuclide that has a 22-year half-life and which has been extensively used for dating sediment and soil samples deposited during the past 100 years. Although  $^{210}\text{Pb}$  is produced in sediments from the decay of  $^{226}\text{Ra}$ , much of the  $^{210}\text{Pb}$  in surface sediments is a result of its removal from the atmosphere via precipitation scavenging and washout. By measuring  $^{210}\text{Pb}$  and  $^{226}\text{Ra}$  profiles in sediment cores, chronological information can be obtained from the decline (by radioactive decay) of atmospherically derived  $^{210}\text{Pb}$  (termed excess  $^{210}\text{Pb}$ ) in the sediment.

Vertical profiles of  $^{137}\text{Cs}$ ,  $^{60}\text{Co}$ , and excess  $^{210}\text{Pb}$  with sediment depth are illustrated for Core 567.5 in Fig. 10. The slope of the line through the data for excess  $^{210}\text{Pb}$  indicates a sediment accumulation rate of about 2.7 cm/year.

Because this core was collected in August 1986, such a sedimentation rate implies that the 80- to 84-cm depth increment and  $^{137}\text{Cs}$  peak were deposited around 1955-1956, which is coincident with the draining of WOL. These data also imply that particle-associated radionuclides released from WOL are transported to and deposited in Watts Bar Reservoir within a year after their discharge. Because of the short half-life of  $^{60}\text{Co}$  (about 5 years), its vertical profile in the sediments is different from that of  $^{137}\text{Cs}$ . Most of the  $^{60}\text{Co}$  deposited with sediments in 1955-1956 has decayed, and consequently  $^{60}\text{Co}$  concentrations are highest in the recently deposited surface sediments.

The vertical distribution of  $^{90}\text{Sr}$  in sediment Core 567.5 is illustrated in Fig. 11. This  $^{90}\text{Sr}$  profile shows a peak concentration of 580 pCi/kg (22 mBq/g) at a sediment depth of 80 to 84 cm and a secondary peak (325 pCi/kg) at 36 to 40 cm. A comparison of this profile with the vertical distribution of  $^{137}\text{Cs}$  (Fig. 10) indicates that the  $^{90}\text{Sr}$  peak at

ORNL-DWG 88M-17372

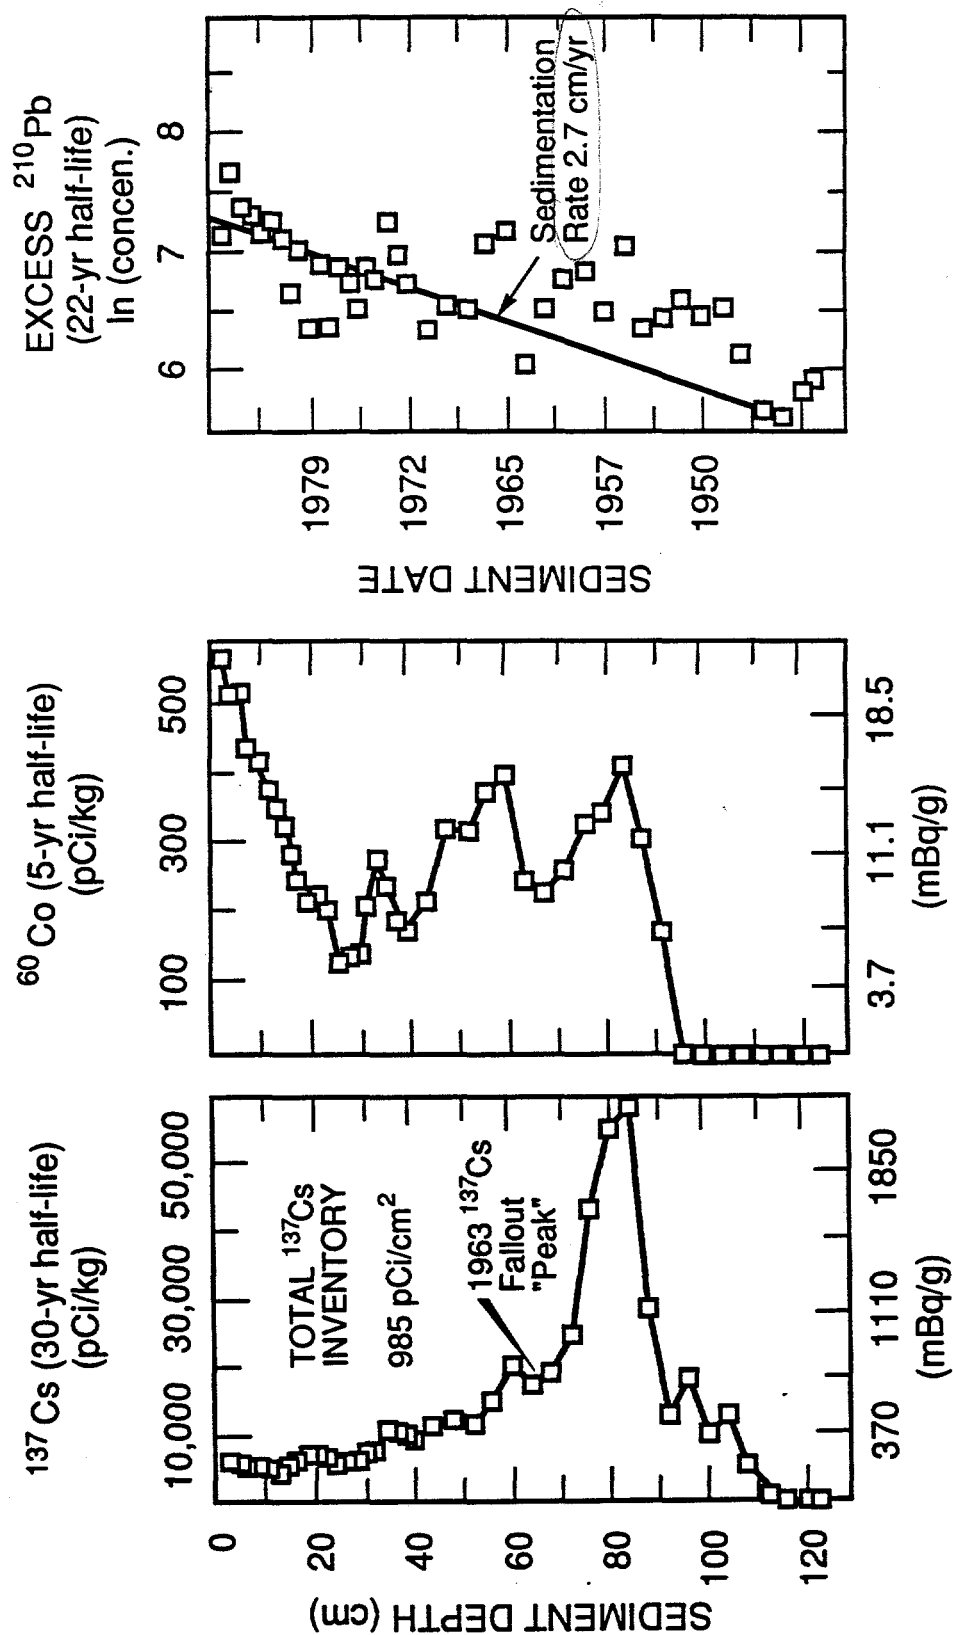


Fig. 10. Vertical profiles for  $^{137}\text{Cs}$ ,  $^{60}\text{Co}$ , and excess  $^{210}\text{Pb}$  in sediment Core 567.5.

# **$^{90}\text{Sr}$ PROFILE IN WATTS BAR SEDIMENT CORE 567.5**

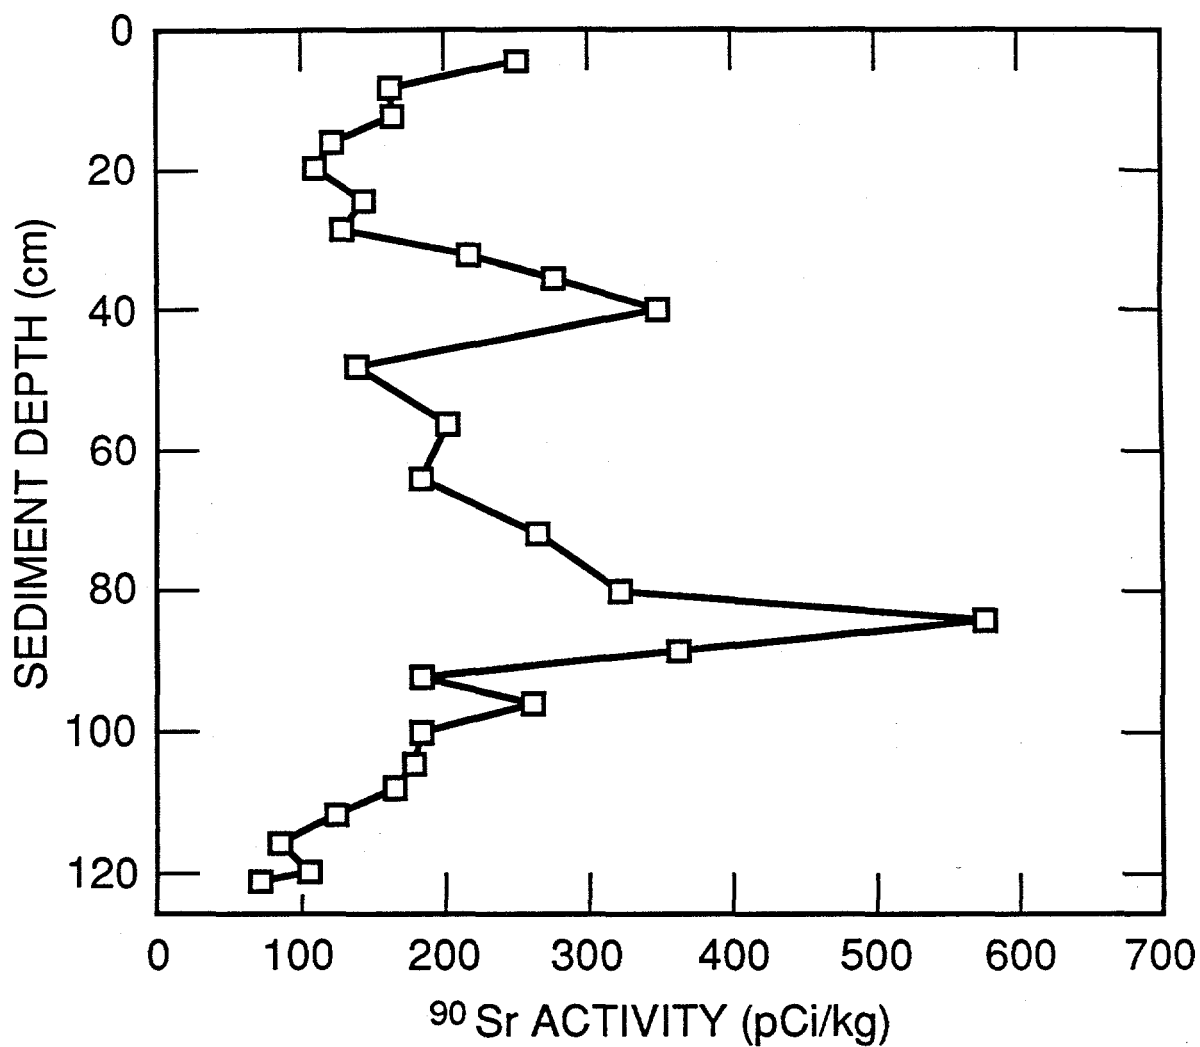


Fig. 11. Vertical distribution of  $^{90}\text{Sr}$  in sediment Core 567.5.

about 80 to 84 cm is coincident with a peak in the  $^{137}\text{Cs}$  concentration but that the secondary  $^{90}\text{Sr}$  peak at about 40 cm occurs at a sediment depth, where the  $^{137}\text{Cs}$  profile is relatively uniform. A sediment accumulation rate of 2.7 cm/year (Fig. 10) suggests that another substantial release of  $^{90}\text{Sr}$  occurred on the ORR during 1972-1973.

The total amount of  $^{137}\text{Cs}$  that has accumulated at the Core 567.5 site can be estimated by summing the vertical distribution of  $^{137}\text{Cs}$  over the diameter of the sediment core. This calculation indicates that about 985 pCi/cm<sup>2</sup>, or 9850 mCi/km<sup>2</sup>, has accumulated at the mouth of the Clinch River into Watts Bar Reservoir. This inventory is about 100 times greater than the  $^{137}\text{Cs}$  inventory expected from global fallout (about 95 mCi/km<sup>2</sup>) in association with the atmospheric testing of nuclear weapons in the mid-1960s.

For comparison, the vertical profile and inventory of  $^{137}\text{Cs}$  in a sediment core collected from Norris Reservoir are presented in Fig. 12. Norris is the reservoir farthest upstream on the Clinch River and drains a relatively pristine area of the Cumberland Mountains. The rate of sediment accumulation (as determined from the excess  $^{210}\text{Pb}$  profile for this core) is 1.8 cm/year. Although the vertical  $^{137}\text{Cs}$  profile in this core also exhibits a peak, it occurs at a sediment depth that corresponds to the 1962-1964 maximum in fallout  $^{137}\text{Cs}$  delivery (Olsen et al. 1989a). The total inventory of  $^{137}\text{Cs}$  in this core is about 49 pCi/cm<sup>2</sup>, or 490 mCi/km<sup>2</sup>, which is about five times greater than the inventory expected from global fallout. The inventory of excess  $^{210}\text{Pb}$  in this Norris sediment core is also about five times greater than the level expected from its atmospheric flux (Olsen et al. 1989a). Consequently, it is suspected that sediments eroded from other areas of the upstream Clinch River (which contain fallout  $^{137}\text{Cs}$  and excess  $^{210}\text{Pb}$ ) are being focused during accumulation at this site. Even with sediment focusing, it is apparent that the inventory of  $^{137}\text{Cs}$  in Watts Bar Reservoir is at least 20 times greater than the inventory expected from atmospheric fallout.

The total burden of  $^{137}\text{Cs}$  in Watts Bar Reservoir sediments was estimated by measuring the inventory of  $^{137}\text{Cs}$  in each sediment core

ORNL-DWG 89M-17373

# RADIONUCLIDES IN NORRIS RESERVOIR SEDIMENTS

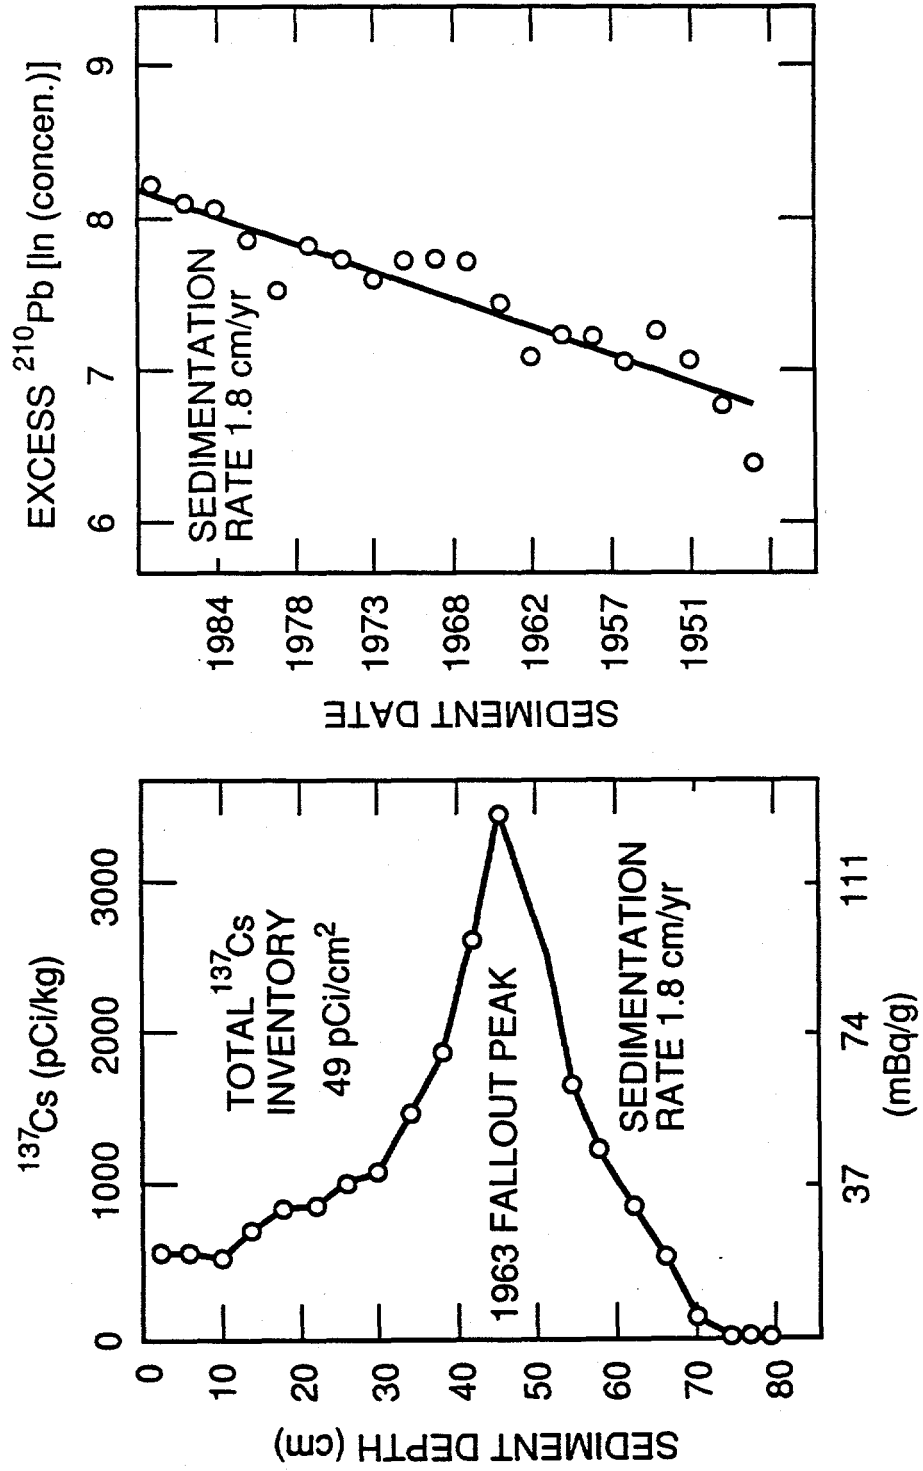


Fig. 12. Vertical profiles for  $^{137}\text{Cs}$  and excess  $^{210}\text{Pb}$  in the sediments of Norris Reservoir.

(Appendix A) and integrating these data over the entire reservoir using a Geographic Information System (GIS) and ARC:INFO software package. Logistically, the reservoir surface area (from the city of Kingston to Watts Bar Dam) was subdivided into polygons (Fig. 13) on the basis of (1) proximity to the mouth of the Clinch River, (2) sedimentary characteristics, and (3) the  $^{137}\text{Cs}$  concentration in surface-sediment samples (Appendix A). A  $^{137}\text{Cs}$  inventory was then calculated for each polygonal area (Fig. 14). In areas where no sediment cores were collected, the  $^{137}\text{Cs}$  inventory was estimated as an average calculated from the inventories for cores collected within the same vicinity and with the same sedimentary characteristics.

The three main points illustrated in Fig. 14 are

1. the highest  $^{137}\text{Cs}$  inventories occur along the old Clinch River and Tennessee River channels (deepest portions of the reservoir), where the impoundment of water has reduced currents and induced rapid accumulation of sediment and particle-associated contaminants;
2. scouring and little or no  $^{137}\text{Cs}$  accumulation is occurring in areas where river currents are still strong and relatively unaffected by Watts Bar Dam; and
3. the sediments in marginal coves appear to contain relatively minor amounts of  $^{137}\text{Cs}$  accumulation, suggesting local sediment sources rather than particles derived from the Clinch or Tennessee rivers.

Although total  $^{137}\text{Cs}$  inventories are greatest along the impounded river channel,  $^{137}\text{Cs}$  concentrations and inventories in near-surface (0- to 50-cm and 0- to 16-cm) sediments appear to be highest along the shallower channel margins (Figs. 15 and 16). This is because peak  $^{137}\text{Cs}$  concentrations occur closer to the sediment surface in areas affected by relatively lower rates of sediment accumulation (Figs. 9 and 15). This has important environmental and ecological implications because (1) epibenthic fauna are generally confined to the top 16 cm of sediment (biologically active layer) and (2) game fish are often caught in shallower marginal habitats.

An estimate for the total accumulation of  $^{137}\text{Cs}$  in Watts Bar Reservoir was obtained both by (1) summing the  $^{137}\text{Cs}$  accumulation in



ORNL-DWG 90-1974

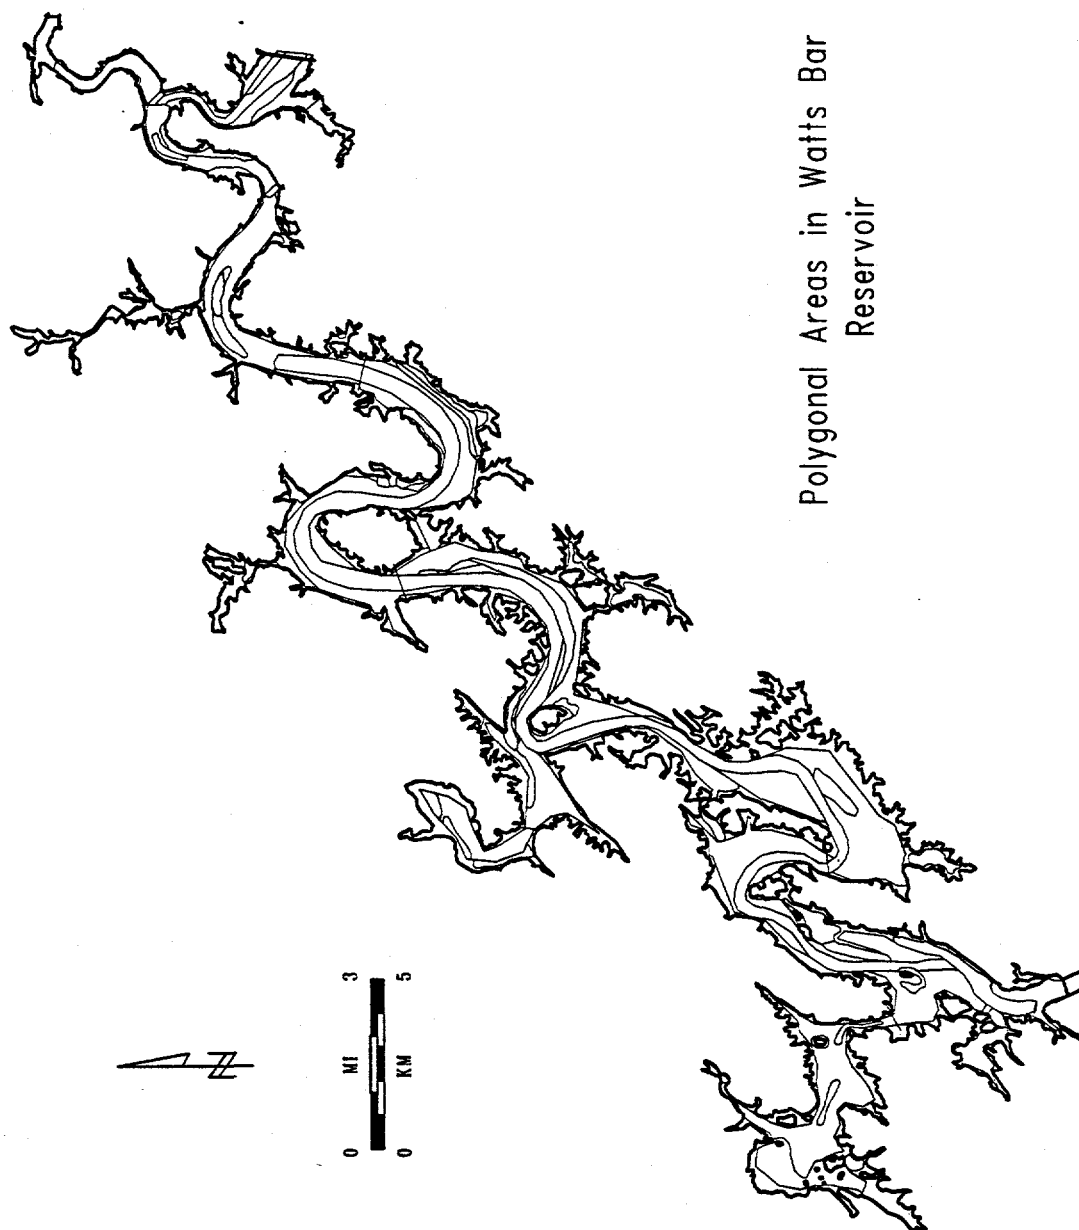


Fig. 13. Map of Watts Bar Reservoir illustrating the GIS polygonal areas that were used for integrating the sediment core data over the entire reservoir.

ORNL-DWG 90-1975

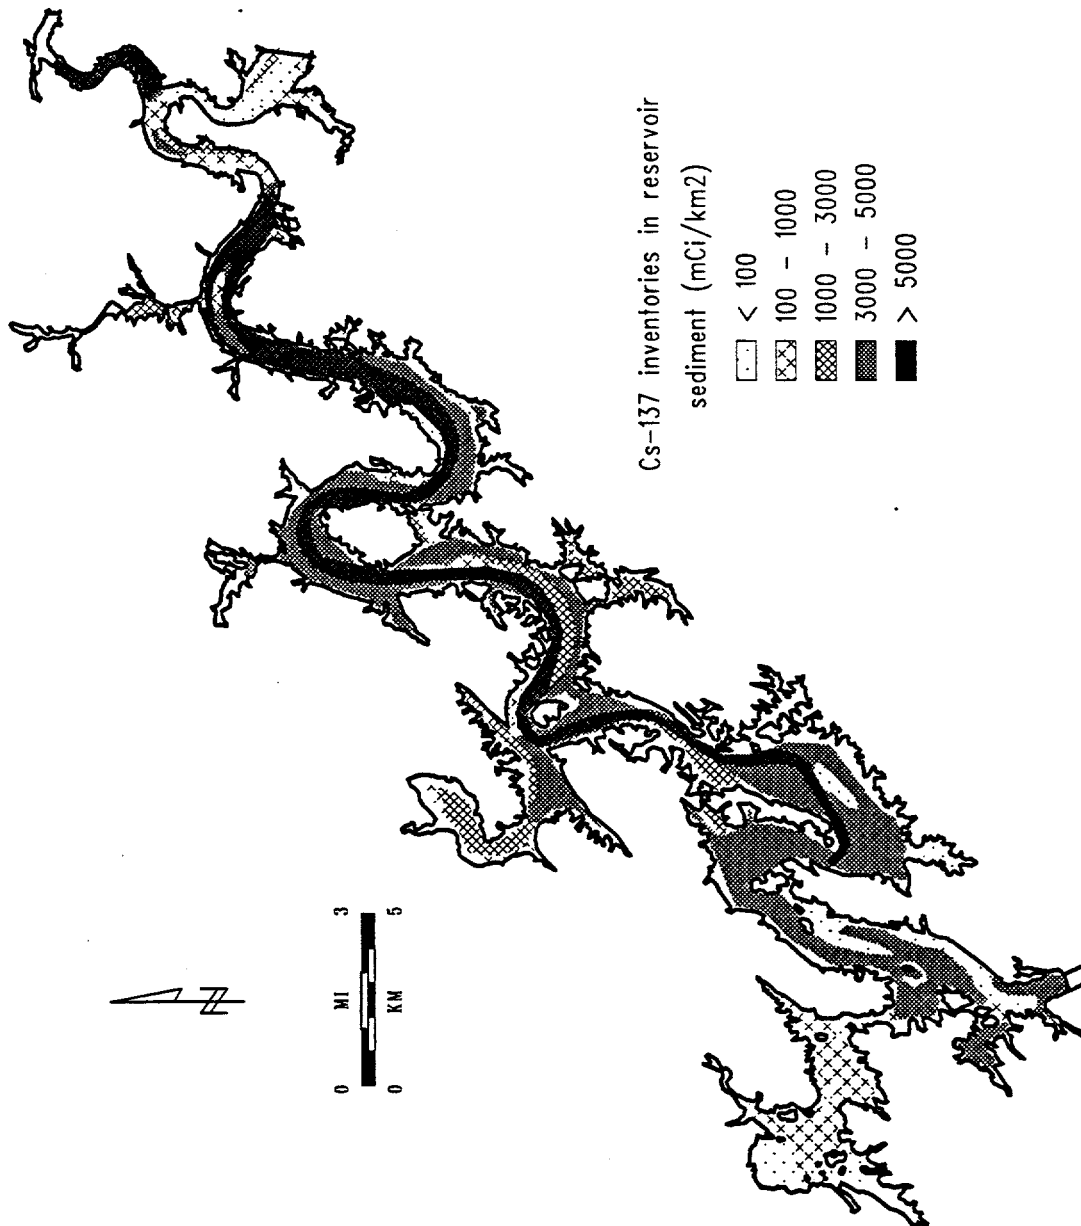


Fig. 14. Map of Watts Bar Reservoir illustrating <sup>137</sup>Cs accumulation patterns and total inventories (mCi/km<sup>2</sup>).

ORNL-DWG 90-1976

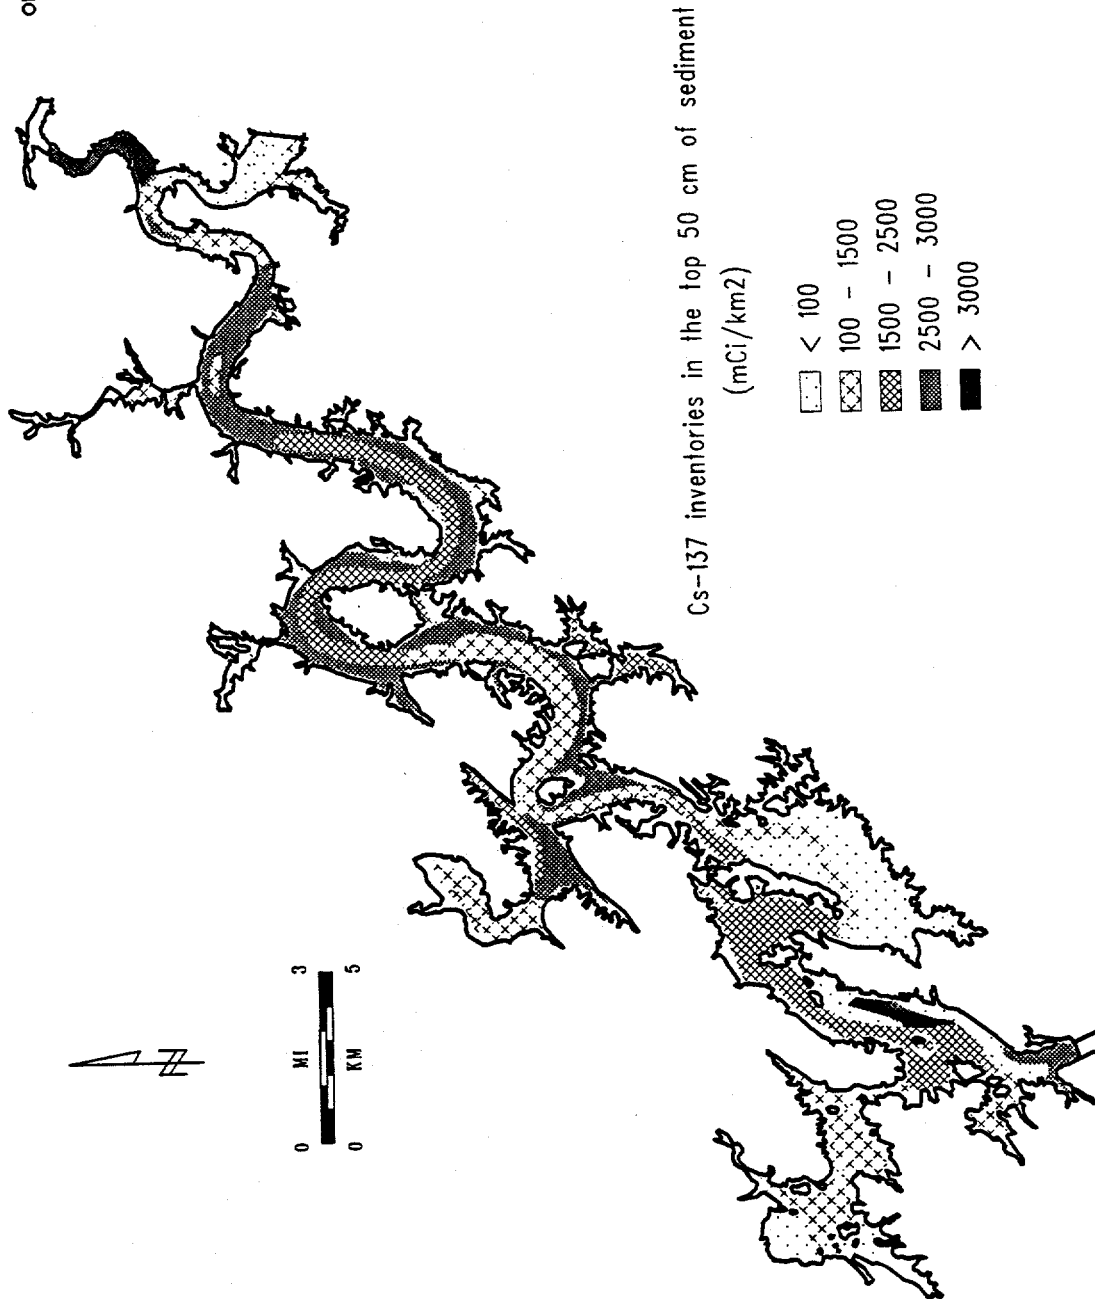


Fig. 15. Map of Watts Bar Reservoir illustrating the inventory (mCi/km<sup>2</sup>) of <sup>137</sup>Cs in the top 50 cm of sediment.

ORNL-DWG 90-1977

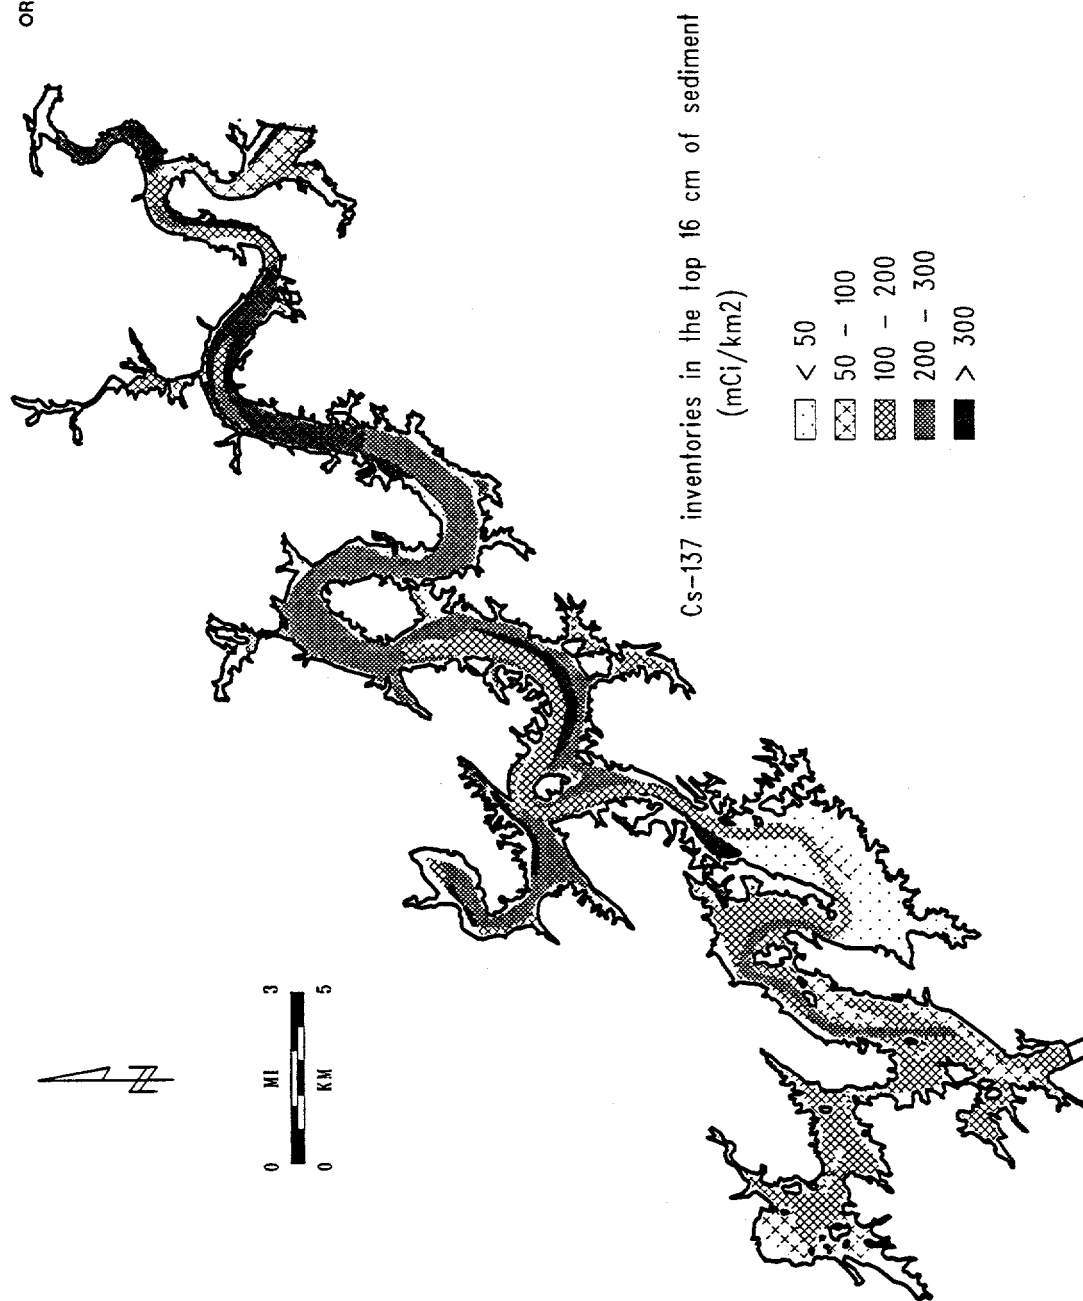


Fig. 16. Map of Watts Bar Reservoir illustrating the inventory (mCi/km<sup>2</sup>) of <sup>137</sup>Cs in the top 16 cm of sediment.

each of the polygonal areas and (2) averaging the  $^{137}\text{Cs}$  inventory for each sediment type (soft mud, clay, sandy mud, sand/gravel, and marginal soil) and multiplying the average inventory by the total area comprised by that sediment type. The total  $^{137}\text{Cs}$  inventory calculated from the sum of the polygons was 290 Ci ( $10.8 \times 10^{12}$  Bq). The total  $^{137}\text{Cs}$  inventory in the sediments of Watts Bar calculated from the average for each sediment type was 276 Ci ( $10.2 \times 10^{12}$  Bq). The difference in these two estimates is only 5%. We suggest that the "sum of the polygons" method is more accurate because the relatively high  $^{137}\text{Cs}$  inventories in soft-mud areas near the Clinch River mouth are included in this method, whereas these inventories are averaged and diluted in the "sediment-type" method. Because a decay-corrected total of 335 Ci of  $^{137}\text{Cs}$  has been released into the Clinch River via WOL, it appears that about 85% of the  $^{137}\text{Cs}$  released from WOD has been trapped within the sediments of Watts Bar Reservoir. The remaining 15% may reflect error in the estimate or uncertainty in the  $^{137}\text{Cs}$  release history or may indicate the relative amount of  $^{137}\text{Cs}$  retained in floodplain areas or transported downstream past Watts Bar Dam.

#### MERCURY AND $^{137}\text{Cs}$ CORRELATIONS

A comparison of the aquatic discharge histories of  $^{137}\text{Cs}$  from ORNL's WOL and inorganic Hg from the Y-12 Plant (Fig. 2) shows the near coincidence of the peak release of  $^{137}\text{Cs}$  in 1956 with that of Hg in 1957-1958 and sharp declines in both releases after 1959. Because of this near coincidence in peak release years and because of the high chemical affinity of both Hg and  $^{137}\text{Cs}$  for particulate matter, the vertical profiles of these two contaminants in sediment cores collected throughout Watts Bar Reservoir were strongly correlated (Fig. 17).

This relationship is illustrated in Fig. 18, and the resultant coefficient of determination ( $r^2$ ) is 0.87. This  $r^2$  value indicates that 87% of the variation in the mercury data can be accounted for by the  $^{137}\text{Cs}$  data via a linear-regression model. The corresponding correlation coefficient ( $r$ ) for the Hg- $^{137}\text{Cs}$  relationship is 0.93. The amount of Hg in a sediment sample from Watts Bar Reservoir can be

ORNL-DWG 89M-13950

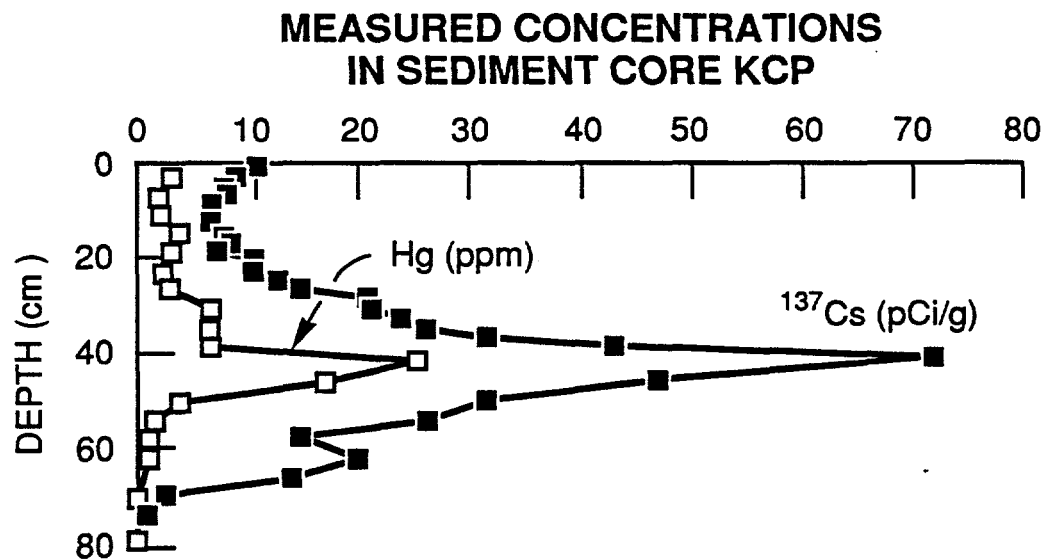
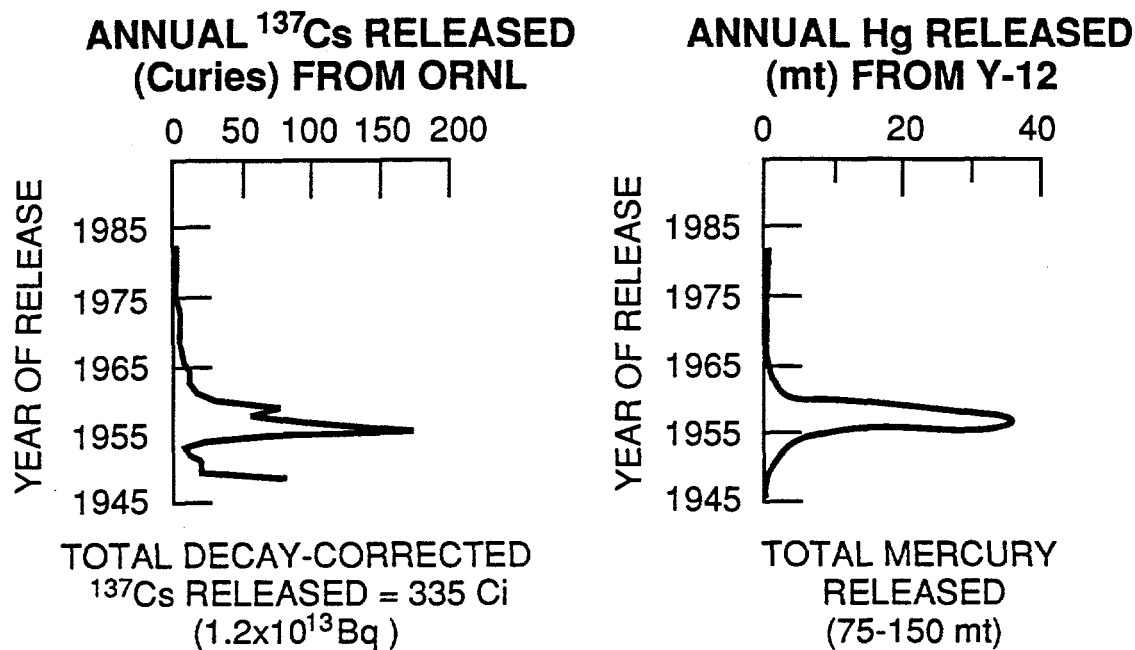


Fig. 17. The history of  $^{137}\text{Cs}$  releases from ORNL and Hg releases from Y-12 compared with the vertical distribution of  $^{137}\text{Cs}$  and Hg in the sediments of Core KCP.

Kingston

ORNL DWG 88M-139/40

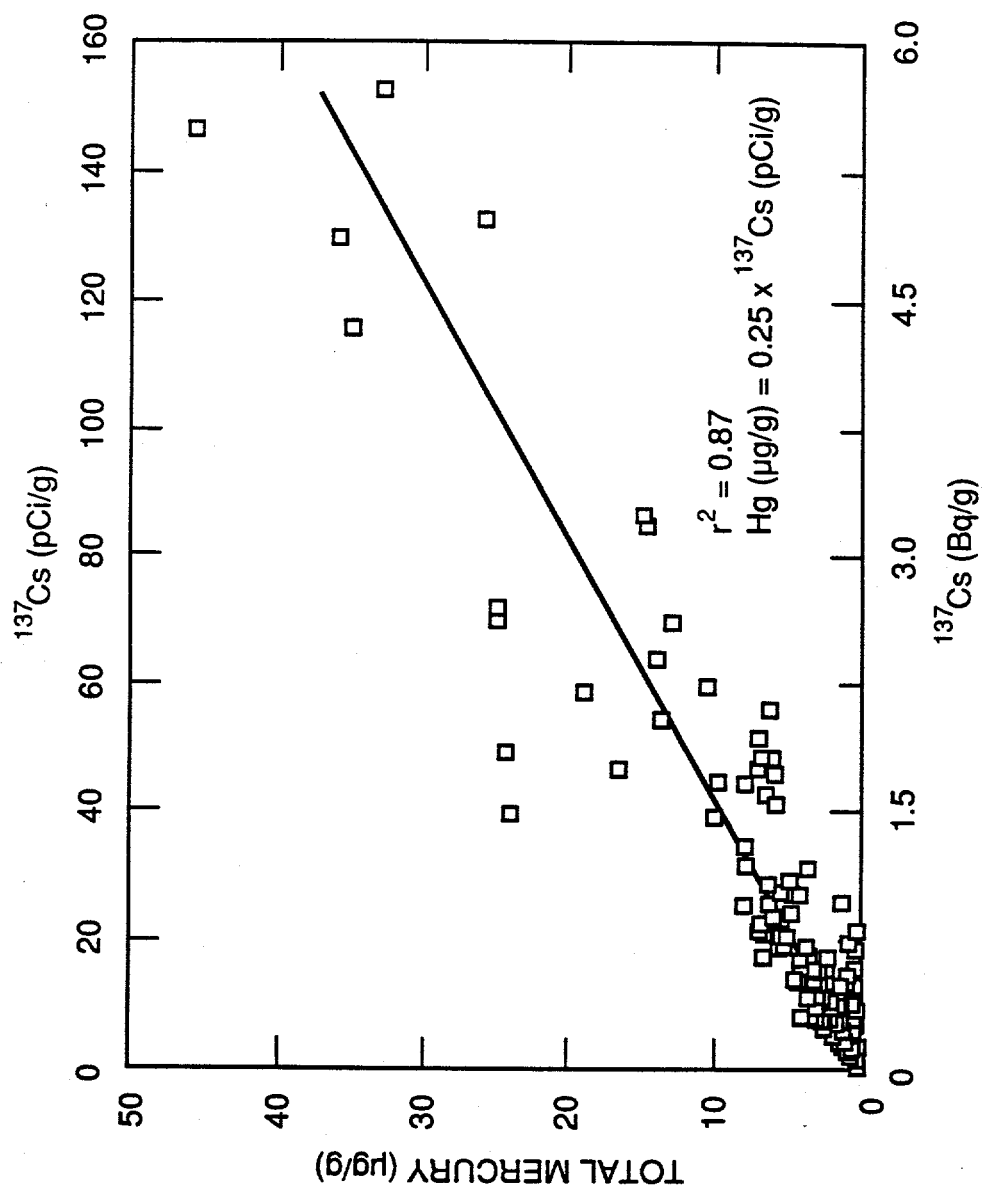


Fig. 18. Graphic illustration of the relationship between the concentration of  $^{137}\text{Cs}$  and the concentration of Hg in the sediments of Watts Bar Reservoir.

estimated fairly accurately by multiplying the  $^{137}\text{Cs}$  inventory by 0.25 (Fig. 18).

Using information on the concentration and distribution of  $^{137}\text{Cs}$  as an indicator of the concentration and distribution of Hg, we have generated GIS maps that illustrate total Hg inventories (Fig. 19) and concentrations (Figs. 20 and 21) in the sediments of Watts Bar Reservoir. In addition, we estimate that about 75 metric tons of Hg has accumulated within the reservoir sediments.

$$\begin{aligned} \text{Hg } (\mu\text{g/g}) &= 0.25 \times ^{137}\text{Cs } (\text{pCi/g}) \\ \text{or} \\ \text{Hg (mt)} &= 0.25 \times ^{137}\text{Cs (Ci)} \\ \text{Hg (mt)} &= 0.25 \times (290 \text{ Ci}) \\ \text{Hg (mt)} &= 72.5. \end{aligned}$$

#### HISTORICAL CONCENTRATIONS OF DISSOLVED MERCURY IN WATTS BAR RESERVOIR

Because sorption onto suspended particles and sediments is the principal mechanism by which many chemically reactive contaminants (such as  $^{137}\text{Cs}$  and Hg) are removed from aquatic systems, the history of contamination in Watts Bar Reservoir has been recorded in the sediments (Fig. 15). Consequently, vertical profiles of  $^{137}\text{Cs}$  or Hg in a chronologically dated sediment core can be used to estimate the age of the sediment and the concentration of Hg in surface sediments during previous years. In addition, by assuming that the particle-to-water distribution of Hg (about  $1 \times 10^5$  in Table 5) has been relatively constant at a specific core site throughout the past, we can estimate past levels of dissolved Hg from the dated levels of Hg in the sediment cores.

Estimates for the historical concentrations of dissolved Hg near the mouth of the Clinch River and in Watts Bar Reservoir are presented in Tables 6 and 7. It is evident from the data in Table 7 that the levels of dissolved Hg ( $0.005 \mu\text{g/L}$ ) estimated from the Hg concentration in the dated surface sediments are similar to the dissolved levels measured in the water column ( $0.004 \text{ ppb}$  in Table 5). At the mouth of the Clinch River, however, before its confluence with the Tennessee River, estimated dissolved Hg concentrations are about three times higher. The highest predicted dissolved Hg levels ( $0.224 \text{ ppb}$  or



ORNL-DWG 90-1978

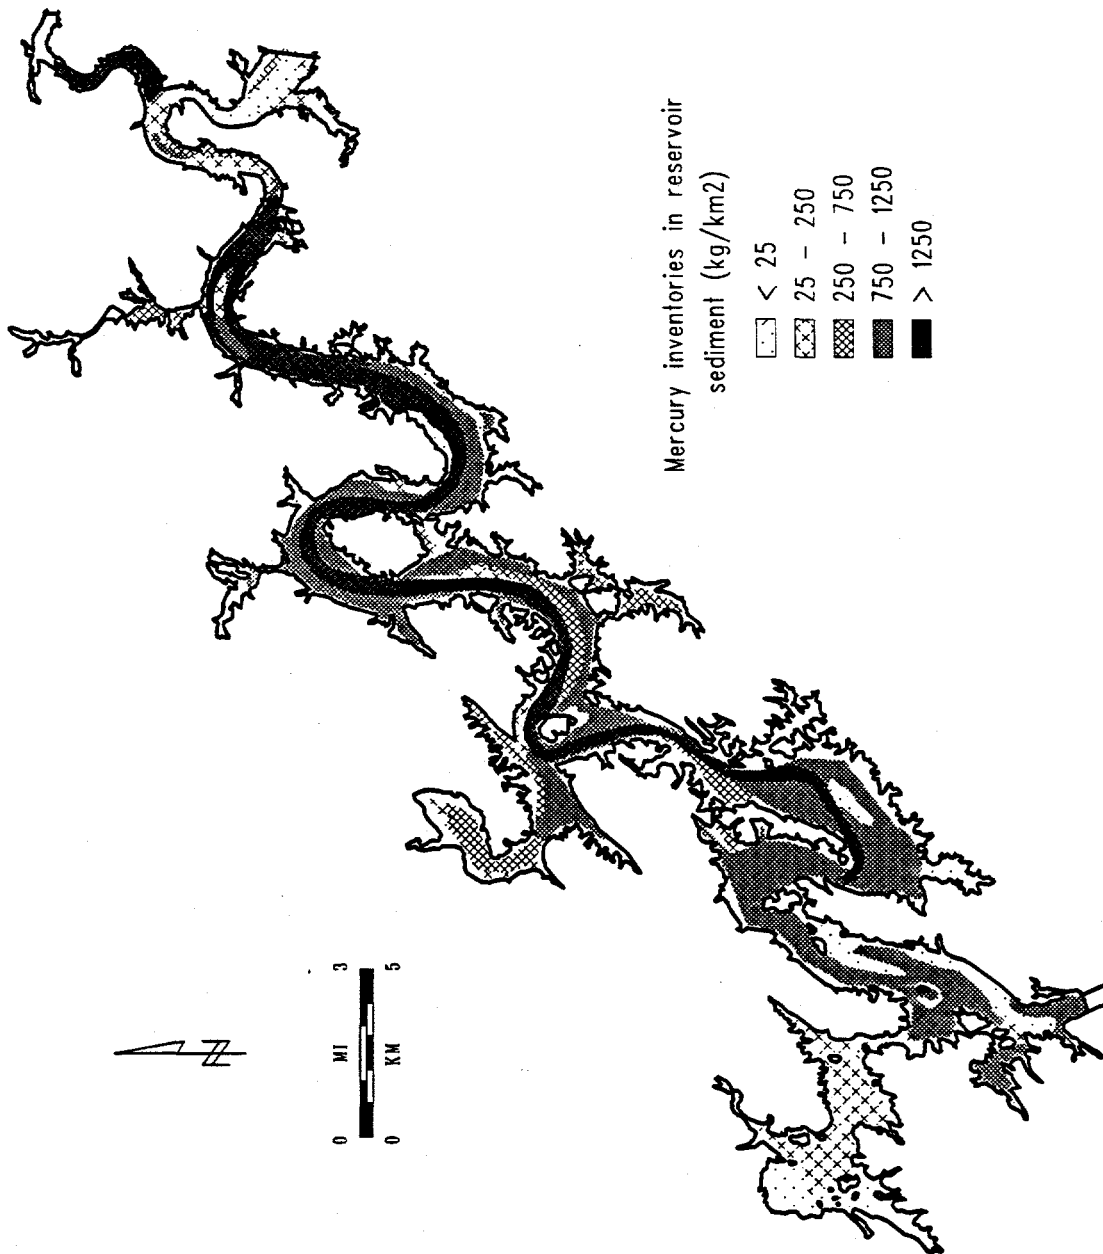


Fig. 19. Map of Watts Bar Reservoir illustrating Hg accumulation patterns and total inventories.

ORNL-DWG 90-1979

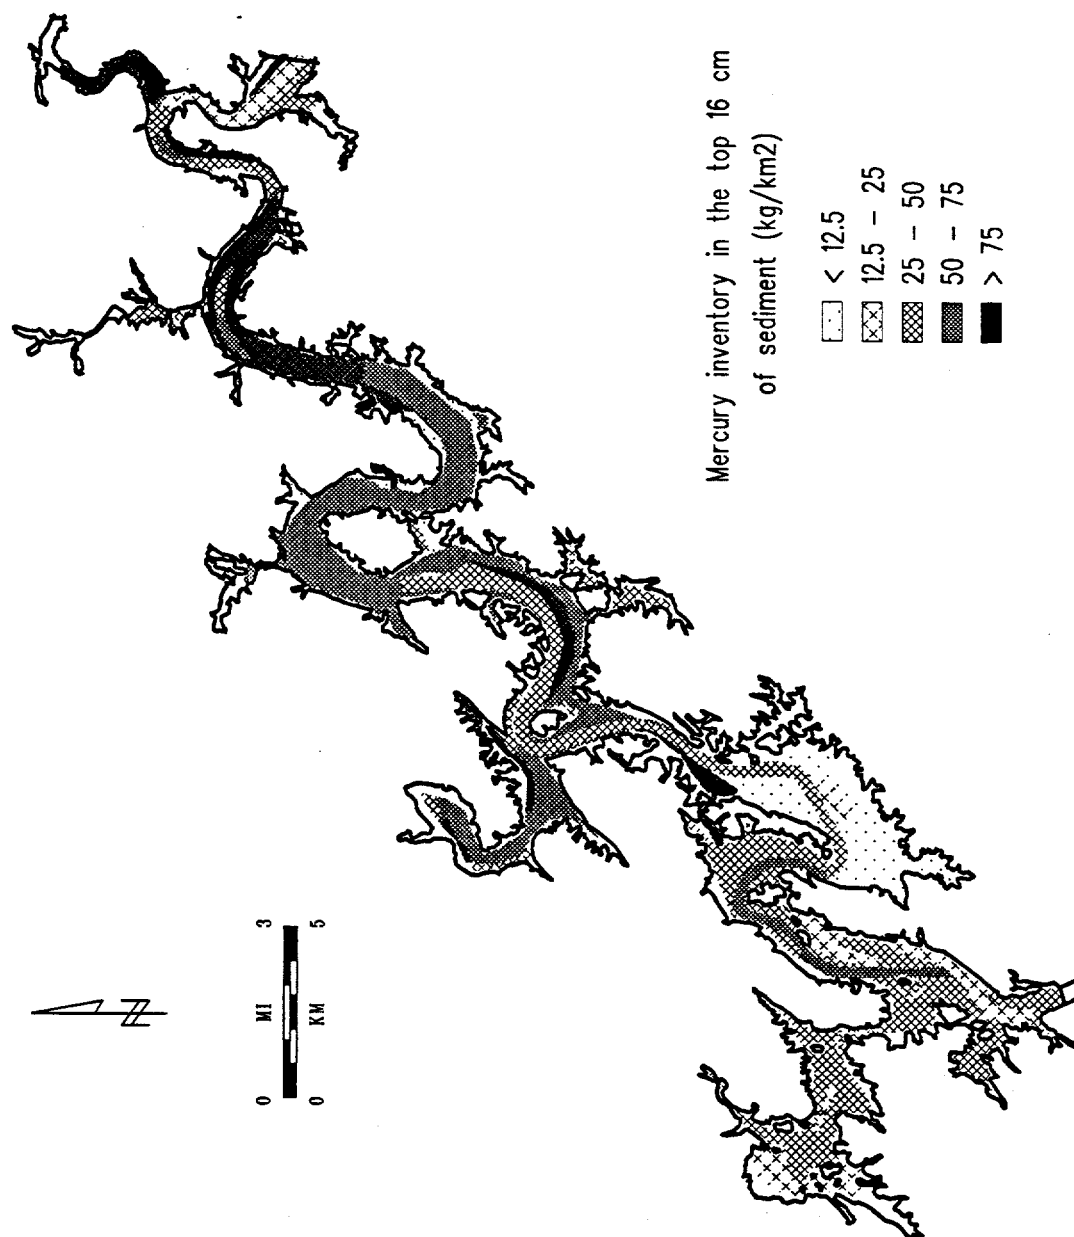


Fig. 20. Map of Watts Bar Reservoir illustrating the Hg inventory in the upper 16 cm of sediment.

ORNL-DWG 90-1980

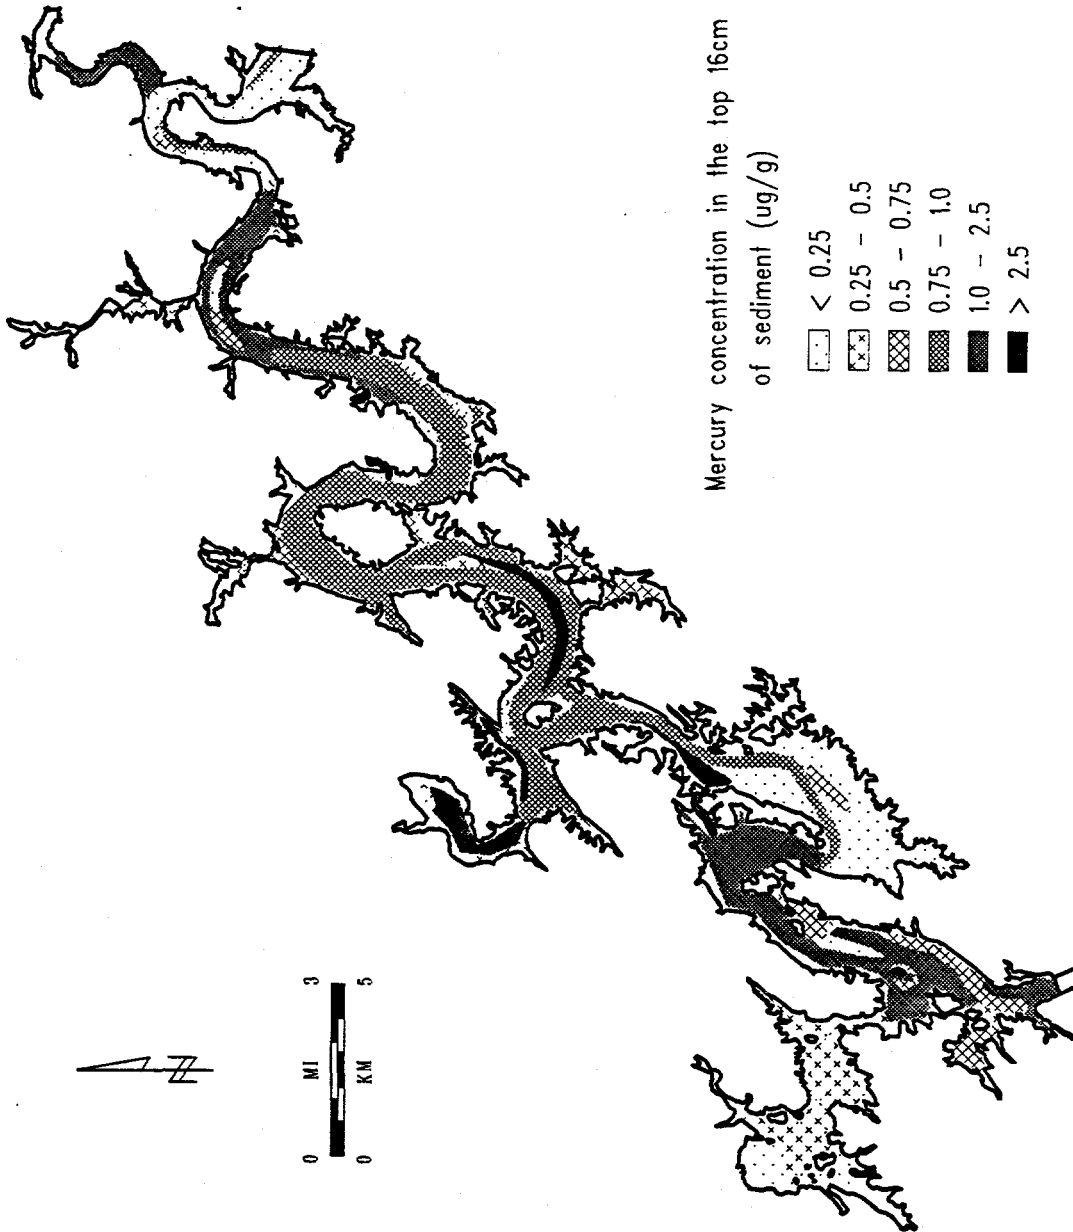


Fig. 21. Map of Watts Bar Reservoir illustrating the average Hg concentration in upper 16 cm of sediment.

Area of rapid sediment accumulation  
 46 T  
 (mouth of Clinch, before  
 confluence w/ TR)

Table 6. Watts Bar sediment Core TRM 567.5 (AUG. 22, 1986)

Depth (cm)	Dry wt. (g)	Cs-137 sediment (pCi/g)	Hg sediment (μ/g)	Hg dissolved <sup>a</sup> (μ/L)	Historical time period <sup>b</sup> (years)
0-4	72.58	5.26 ± 0.06	1.52 <sup>1520ppb</sup>	0.015	1986
4-8	119.62	5.68 ± 0.07	1.36	0.014	1984-1985
8-12	127.51	5.06 ± 0.08	1.77	0.018	1983
12-16	140.85	6.05 ± 0.19	2.42	0.024	1981-1982
16-20	147.80	7.39 ± 0.07	3.16	0.032	1980
20-24	144.13	6.51 ± 0.06	2.32	0.023	1978-1979
24-28	138.34	6.61 ± 0.06	2.32	0.023	1977
28-32	109.97	7.85 ± 0.06	3.33	0.033	1975-1976
32-36	101.34	11.01 ± 0.09	3.44	0.034	1974
36-40	133.20	9.81 ± 0.06	2.98	0.030	1972-1973
40-48	144.17	12.03 ± 0.24	2.91	0.029	1969-1971
48-56	149.98	13.56 ± 0.11	4.12	0.041	1966-1968
56-64	161.15	19.02 ± 0.15	5.10	0.051	1963-1965
64-72	156.36	22.24 ± 0.11	6.80	0.068	1960-1962
72-80	145.92	49.08 ± 0.21	24.40	0.244	1957-1959
80-84	70.62	58.36 ± 0.17	19.00	0.190	1955-1956
84-88	78.68	28.66 ± 0.11	6.31	0.063	1952-1954
88-92	81.22	13.01 ± 0.07	1.24	0.012	1950-1951
92-96	79.15	18.59 ± 0.08	0.36	0.004	1948-1949
96-100	77.05	10.64 ± 0.07	0.35	0.003	1946-1947
100-104	76.68	13.11 ± 0.07	0.31	0.003	
104-108	75.71	5.84 ± 0.05	0.34	0.003	
108-112	81.48	0.87 ± 0.02	0.12	0.001	
112-116	118.11	0.25 ± 0.03	0.09	0.001	
116-120	119.10	0.27 ± 0.05	0.05	0.001	
120-122	125.07	0.00 ± 0.00			

<sup>a</sup>Estimated using a particle-to-water distribution ratio of 10E5.

<sup>b</sup>Estimated using a sediment accumulation rate of 1.4 cm/year.

2.7

should be 1E5  
 (1 × 10<sup>5</sup>)

See p. 29 - sediment accumulation rate  
 determined using decline (decay) of  
 atmospherically-derived 210pb  
 = 2.7 cm/yr  
 ↳ for core TRM 567.5!

7 at "reservoir margin"  
 (mid - Watts Bar  
 Reservoir)

Table 7. Watts Bar sediment Core 8-2-3 (Oct. 17, 1986)

Depth (cm)	Dry wt (g)	$^{137}\text{Cs}$ sediment (pCi/g)	Hg sediment ( $\mu\text{g/g}$ )	Hg dissolved <sup>a</sup> ( $\mu\text{L}$ )	Historical time period <sup>b</sup> (years)
0-4	13.81	$3.74 \pm 0.10$	0.52	0.005	1984-1986
4-8	18.10	$3.80 \pm 0.10$	0.53	0.005	1981-1983
8-12	26.93	$3.71 \pm 0.33$	0.52	0.005	1978-1980
12-16	31.17	$4.43 \pm 0.24$	0.64	0.006	1975-1977
16-20	31.26	$4.22 \pm 0.30$	0.72	0.007	1972-1974
20-24	32.77	$5.19 \pm 0.25$	0.78	0.008	1969-1971
24-28	37.01	$5.84 \pm 0.35$	1.07	0.011	1966-1968
28-32	39.95	$11.76 \pm 0.40$	1.75	0.018	1964-1965
32-36	43.53	$15.87 \pm 0.53$	2.30	0.023	1961-1963
36-40	44.33	$24.34 \pm 0.47$	4.69	0.047	1958-1960
40-44	42.08	$27.57 \pm 0.50$	5.46	0.055	1956-1958
44-48	42.64	$9.45 \pm 0.42$	1.08	0.011	1953-1955
48-52	46.06	$10.53 \pm 0.30$	0.47	0.005	1950-1952
52-56	48.91	$11.67 \pm 0.41$	0.29	0.003	1947-1949
56-60	63.41	$3.33 \pm 0.19$	0.14	0.001	1944-1946
16 60-62	53.50	$0.29 \pm 0.07$	0.06	0.001	

<sup>a</sup>Estimated using a particle-to-water distribution ratio of  $10E5$ .

<sup>b</sup>Estimated using a sediment accumulation rate of 1.4 cm/year.

$\mu\text{g/L}$ ) occurred between 1957 and 1959 at this site (Table 6). At the mouth of Whites Creek near the midsection of Watts Bar Reservoir (Fig. 1), the highest predicted dissolved Hg concentrations were about  $0.06 \mu\text{g/L}$  (Table 7), and these levels also occurred during 1957-1958.

This information is critical for assessing the environmental and health risks associated with the past discharges of contaminants into aquatic systems. Historical estimates for dissolved contaminants with additional information on contaminant bioaccumulation in organisms are needed to predict contaminant levels in fish caught and consumed in prior years. Once particle-to-water distributions and vertical sedimentary profiles for other contaminants of concern are measured in Watts Bar Reservoir, it will be possible to obtain relatively accurate estimates for their past concentrations in drinking water or edible tissues.

#### SUMMARY

Operations and waste disposal activities on the U.S. Department of Energy's ORR have introduced  $^{137}\text{Cs}$  and Hg into local streams that ultimately drain into the Clinch River and Tennessee River systems. Previous work has shown that (1) the highest discharges for both  $^{137}\text{Cs}$  and Hg occurred during the mid-1950s; (2) contaminants introduced into the Clinch River have not remained there in either the bottom sediments or in the biota but instead have been flushed downstream; and (3) Watts Bar Reservoir (like other reservoirs on river systems) serves as a very efficient trap for riverborne particles, nutrients, and contaminants and is therefore a site of rapid sediment and contaminant accumulation.

To address the need for characterizing the nature and extent of contamination in Watts Bar Reservoir, we have measured the vertical distribution of  $^{137}\text{Cs}$  in over 60 sediment cores and the concentration of  $^{137}\text{Cs}$  in more than 190 surface-sediment samples. This work represents the initial scoping phase for the Clinch River RFI and uses the distribution of  $^{137}\text{Cs}$  to identify contaminant accumulation patterns and potential problem, or "hot-spot," areas with regard to environmental

hazard or human health. Radiocesium was chosen for this scoping effort because (1) its history of release into the Clinch River is reasonable well documented, (2) it is easy and inexpensive to measure by gamma spectrometry, and (3) it is rapidly sorbed to particulate matter and thus serves as a cost-effective tracer for identifying the transport and accumulation patterns of many other contaminants that are strongly associated with particulate matter, such as mercury (Hg), lead (Pb), plutonium (Pu), polychlorinated biphenyls (PCBs), other metals, and synthetic organic compounds.

The results from this study indicate that both  $^{137}\text{Cs}$  and Hg are strongly associated with particles in Watts Bar Reservoir and have particle-to-water sorption ratios with values about  $10^5$ . Vertical distributions of  $^{137}\text{Cs}$  and Hg in the reservoir sediments are also strongly correlated ( $r^2 = 0.87$ ), with both contaminants exhibiting a large subsurface peak coincident with their peak discharge histories. The sediment depth of this subsurface peak and the thickness of contaminated sediment varies with location in the reservoir and depends on the rate of sediment accumulation.

The total accumulation of  $^{137}\text{Cs}$  in Watts Bar Reservoir sediments was estimated by measuring the  $^{137}\text{Cs}$  inventory in each sediment core and extrapolating these data spatially with a GIS and ARC:INFO software package. These results indicate that about 290 Ci ( $1.07 \times 10^{13}$  Bq) of  $^{137}\text{Cs}$  now reside in the reservoir sediments. Discharge records indicate that a decay-corrected total of about 335 Ci ( $1.24 \times 10^{13}$  Bq) of  $^{137}\text{Cs}$  was released into the Clinch River system since 1949. This indicates that more than 85% of the total  $^{137}\text{Cs}$  released has been retained by accumulation in the reservoir sediments.

The strong correlation between the vertical distribution of  $^{137}\text{Cs}$  and Hg in the reservoir sediments was used to estimate that about 75 metric tons of Hg also reside in the sediments of Watts Bar Reservoir. In addition, the historical record of Hg accumulation in dated sediment cores was used to document levels of contamination in the reservoir water-column during the past 40 years. The highest level of dissolved Hg predicted from these data is about 0.224 ppb, which occurred between 1957 and 1959.

This initial scoping study was conducted to provide a preliminary characterization of the spatial extent of ORR-derived contamination in off-site areas, to help design cost-effective sampling strategies in environmental risk and human health assessments, and to identify specific off-site areas requiring more detailed work. Additional characterization of contaminant concentrations and distributions in the sediments, soils, water, and biota of off-site surface water environments will be conducted as part of the Clinch River RCRA Facility Investigation. These additional and more extensive site characterization data will be used to (1) further define the nature and extent of off-site contamination occurring downstream of the Oak Ridge Reservation, (2) estimate potential risks to human health and to the environment that may be associated with the occurrence of off-site contaminants, and (3) evaluate the need for remediation activities designed to reduce human-health and environmental risks.



## REFERENCES

- Ashwood, T. L., C. R. Olsen, I. L. Larsen, and P. D. Lowry. 1986. *Sediment Contamination in Streams Surrounding the Oak Ridge Gaseous Diffusion Plant*. ORNL/TM-9791.
- Cottrell, W. D. 1959. *Radioactivity in Silt of the Clinch and Tennessee Rivers*. ORNL-2847.
- Cowser, K. E., W. S. Snyder, C. P. McCammon, C. P. Straub, O. W. Kochtitzky, R. L. Hervin, E. G. Struxness, and R. J. Morgan. 1966. Evaluation of radiation dose to man from radionuclides released to the Clinch River. pp. 639-671 IN *Disposal of Radioactive Wastes into Seas, Oceans, and Surface Waters*, IAEA, Vienna.
- Dendy, F. E. 1973. Sediment trap efficiency of small reservoirs. pp. 898-908 IN W. C. Ackerman, G. F. White, E. B. Worthington, and J. L. Ivens (eds.), *Man-Made Lakes: Their Problems and Environmental Effects*, American Geophysical Union Monograph 17, Washington, D.C.
- DOE. 1988. *Historical Radionuclide Releases from Current DOE Oak Ridge Operations Office Facilities*. OR-890. U.S. DOE, Oak Ridge Operations Office, Oak Ridge, Tenn.
- Elwood, J. W. 1984. *Mercury contamination in Poplar Creek and the Clinch River*. ORNL/TM-8893.
- Jones, C. G., L. E. McNeese, C. L. Baker, L. D. Bates, C. W. Snodgrass, and L. E. Stratton. 1990. Environmental restoration and waste management site-specific plan for the Oak Ridge Reservation. K/ESH-1. Martin Marietta Energy Systems, Inc. Oak Ridge, Tennessee.
- Kimmel, B. L. and A. Groeger. 1986. Limnological and ecological changes associated with reservoir aging. pp. 103-109 IN G. E. Hall and M. J. Van Den Avyle (eds.), *Reservoir Fisheries Management: Strategies for the '80s*. Reservoir Committee, American Fisheries Society, Bethesda, Md.
- Larsen, I. L., and N. H. Cutshall. 1981. Direct determination of  $^7\text{Be}$  in sediments. *Earth Planet. Sci. Lett.* 54:379-384.

- Loar, J. M., S. M. Adams, G. B. Blaylock, H. L. Boston, M. A. Houston, B. L. Kimmel, J. T. Kitchings, C. R. Olsen, M. J. Ryon, J. G. Smith, G. R. Southworth, A. J. Stewart, B. T. Walton, H. Amano, C. T. Garten, and L. J. Meyers. 1987. *First Annual Report on the ORNL Biological Monitoring and Abatement Program*, Draft report. ORNL/TM-10399.
- Nelson, D. J. 1969. Ecological behavior of radionuclides in the Clinch and Tennessee rivers. pp. 169-187 IN *Proceedings, Reservoir Fishery Research Symposium*, April 5-7, 1967, Athens, Ga.
- Oakes, T. W., W. F. Ohnesorge, J. S. Eldridge, T. G. Scott, D. W. Parsons, H. M. Hubbard, O. M. Sealand, K. E. Shank, and L. D. Eyman. 1982. *Technical Background Information for the Environmental and Safety Report, Volume 5: The 1977 Clinch River Sediment Survey -Data Presentation*. ORNL-5878.
- Ohnesorge, W. F. 1986. *Historical Releases of Radioactivity to the Environment from ORNL*. ORNL/M-135.
- Olsen, C. R., I. L. Larsen, N. H. Cutshall, J. F. Donoghue, O. P. Bricker, and H. J. Simpson, H. J. 1981. Reactor-released radionuclides in Susquehanna River sediments. *Nature* 294:242-245.
- Olsen, C. R., and N. H. Cutshall. 1985. Contaminant levels in the soils and sediments near the proposed Blair Road Bridge construction site. Letter Report to H. Y. Hibbits from T. W. Oakes, Nov. 1, 1985.
- Olsen, C. R., I. L. Larsen, P. D. Lowry, R. I. Mclean, and S. L. Domotor. 1989a. *Radionuclide Distributions and Sorption Behavior in the Susquehanna-Chesapeake Bay System*. Power Plant and Environmental Review PPER-R-12, Maryland Department of Natural Resources, Annapolis, Md.
- Olsen, C. R., M. Thein, I. L. Larsen, P. D. Lowry, P. J. Mulholland, N. H. Cutshall, J. T. Byrd, and H. L. Windom. 1989. Plutonium, lead-210, and stable carbon isotopes in the Savannah estuary: riverborne versus marine sources," *Environ. Sci. Technol.* 24:1475-1481.

- Parker, F. L., M. A. Churchill, R. W. Andrew, B. J. Frederick, P. H. Carrigan, Jr., J. S. Cragwall, Jr., S. L. Jones, E. G. Struxness, and R. J. Morton. 1966. Dilution, dispersion, and mass transport of radionuclides in the Clinch and Tennessee rivers. pp. 33-55 IN *Disposal of Radioactive Wastes into Seas, Oceans, and Surface Waters*, IAEA, Vienna.
- Pickering, R. J., P. H. Carrigan, Jr., T. Tamura, A. A. Abee, J. W. Beverage, and R. W. Andrew, Jr. 1966. Radioactivity in the bottom sediments of the Clinch and Tennessee rivers. pp. 57-88 IN *Disposal of Radioactive Wastes into Seas, Oceans, and Surface Waters*, IAEA, Vienna.
- Ritchie, J. C., P. H. Hawks, and J. R. McHenry. 1975. Deposition rates in valleys determined using fallout  $^{137}\text{Cs}$ . *Geol. Soc. Amer. Bull.* 86:1128-1130.
- Struxness, E. G., P. H. Carrigan, M. A. Churchill, K. E. Cowser, R. J. Morton, D. J. Nelson, and F. L. Parker. 1967. *Comprehensive Report of the Clinch River Study*. ORNL-4035.
- Turner, R. R., C. R. Olsen, and W. J. Wilcox, Jr. 1985. Environmental Fate of Hg and  $^{137}\text{Cs}$  Discharged from Oak Ridge Facilities. pp. 329-338 IN D. D. Hemphill (ed.), *Trace Substances in Environmental Health - XVIII*. University of Missouri, Columbia.
- TVA. 1986. *Summary Report for Task 5 of the Instream Contaminant Study*, Tennessee Valley Authority, Knoxville, Tenn.

**Appendix A**

**RADIONUCLIDE CONCENTRATIONS IN WATTS BAR RESERVOIR SEDIMENTS**



Sample identification	Sample type <sup>a</sup>	Depth (ft)	<sup>137</sup> Cs (pCi/g)	<sup>137</sup> Cs (pCi/cm <sup>2</sup> )	<sup>40</sup> K (pCi/g)
C-KCP	soft sed		7.76 ± 0.06	1587	12.9 ± 0.3
5-1	soft sed	5	no sample		
5-2	soft sed	24	5.99 ± 0.05		12.4 ± 0.3
5-3	soft sed	50	10.65 ± 0.08		14.6 ± 0.4
5-4	soft sed	15	4.67 ± 0.04		12.0 ± 0.3
C-567.5	soft sed	20	6.38 ± 0.07	986	17.7 ± 0.6
WH-1	sandy mud	7	0.38 ± 0.01		10.5 ± 0.1
WH-2	soft sed	10	1.35 ± 0.02		14.4 ± 0.2
C-GCS	soft sed		1.67 ± 0.04	59	14.8 ± 0.5
C-7GC	clay mud		1.09 ± 0.02	148	14.1 ± 0.3
5A-1	soft sed	35	0.29 ± 0.02		13.7 ± 0.4
5A-2	sand	6	0.12 ± 0.02		13.3 ± 0.3
5A-3	sand	9	0.24 ± 0.02		13.1 ± 0.4
5A-4	sand	9	0.14 ± 0.03		12.2 ± 0.4
5A-5	sandy mud	24	0.29 ± 0.01		12.5 ± 0.3
5A-6	soft sed	30	0.41 ± 0.06		13.8 ± 0.8
5-3-1	soil gravel	6	0.67 ± 0.01		8.6 ± 0.2
5-3-2	sandy mud	20	0.61 ± 0.01		12.1 ± 0.2
5-3-3	sandy mud	60	1.37 ± 0.02		7.6 ± 0.2
5-4-1	soft sed	8	no sample		
C-5-4-2	sandy mud	8	1.26 ± 0.03	15	14.0 ± 0.3
5-4-3	sandy mud	30	0.45 ± 0.01		12.0 ± 0.1
5-4-4	sand gravel	65	0.58 ± 0.01		7.9 ± 0.2
5-4-5	soft sed	18	4.44 ± 0.04		21.3 ± 0.3
C-5-4-5	soft sed	18	3.48 ± 0.08	823	18.9 ± 0.6
5-5-1	sandy mud	65	1.63 ± 0.02		11.1 ± 0.2
5-5-2	sandy mud	54	2.57 ± 0.03		11.5 ± 0.3
5-5-3	sand gravel	18	0.11 ± 0.01		9.9 ± 0.2
6-1-1	sand gravel	12	1.98 ± 0.03		13.2 ± 0.3
6-1-2	sandy mud	16	2.78 ± 0.04		13.5 ± 0.3
6-1-3	sand gravel	6	no sample		
6-1-3A	sandy mud	12	2.64 ± 0.04		12.9 ± 0.3
6-1-4	soft sed	60	2.66 ± 0.05		11.6 ± 0.4
6-1-5	soft sed	45	2.61 ± 0.04		13.3 ± 0.3
6-1-6	soft sed	12	3.57 ± 0.04		13.4 ± 0.3
C-6-1-6	soft sed	12	3.89 ± 0.06	407	14.7 ± 0.5
CC1	sandy mud	20	0.90 ± 0.03		18.5 ± 0.4
C-CC1	sandy mud	20	1.15 ± 0.10	91	12.0 ± 1.2
CC2	sandy mud	20	0.87 ± 0.02		20.3 ± 0.3
CC3	sandy mud	20	1.02 ± 0.03		10.7 ± 0.3
C-CC3	sandy mud	20	0.86 ± 0.04	111	13.3 ± 0.5
C-6-2-1	soft sed	18	3.04 ± 0.06	716	14.3 ± 0.6
6-2-2	soil sed	35	2.36 ± 0.05		10.9 ± 0.4
GC-6-2-2	soil sed	35	2.94 ± 0.04	>186	12.6 ± 0.5
6-2-3	sandy mud	27	1.28 ± 0.03		12.1 ± 0.3

Sample Identification	Sample type <sup>a</sup>	Depth (ft)	<sup>137</sup> Cs (pCi/g)	<sup>137</sup> Cs (pCi/cm <sup>2</sup> )	<sup>40</sup> K (pCi/g)
6-2-4	soft sed	45	2.81 ± 0.06		12.9 ± 0.5
GC-6-2-4	soft sed	45	3.44 ± 0.07	>218	13.2 ± 0.6
6-2-5	hard claymud	20	2.20 ± 0.03		15.4 ± 0.3
6-3-1	sandy mud	30	2.39 ± 0.03		11.8 ± 0.2
C-6-3-1	sandy mud	30	2.48 ± 0.04	314	13.8 ± 0.3
6-3-2	soft sed	39	3.06 ± 0.06		13.3 ± 0.5
GC-6-3-2	soft sed	39	3.78 ± 0.07	>474	14.8 ± 0.5
C-6-3-3	soft sed	30	3.11 ± 0.07	542	17.1 ± 0.7
6-4-1	sand gravel	20	0.89 ± 0.02		7.3 ± 0.2
6-4-2	sand gravel	20	1.38 ± 0.03		6.9 ± 0.2
6-4-3	sand gravel		no sample		
6-4-4	soft sed	25	2.61 ± 0.03		13.7 ± 0.3
C-6-4-4	soft sed	26	2.85 ± 0.07	544	15.1 ± 0.1
6-4-5	soft sed	25	2.89 ± 0.05		14.1 ± 0.4
6-4-6	soft sed	50	2.92 ± 0.06		13.9 ± 0.5
GC-6-4-M	soft sed	50	3.37 ± 0.08	>404	12.6 ± 0.5
6-4-7	soft sed	50	3.16 ± 0.05		14.5 ± 0.4
6-4-8	soft sed	30	2.87 ± 0.08		13.3 ± 0.6
6-4-9	soil sed	25	2.21 ± 0.03		9.1 ± 0.3
GC-6-4-9	soil sed	25	3.42 ± 0.07	>104	14.5 ± 0.5
7-1-1	soft sed	35	2.34 ± 0.04		12.9 ± 0.4
C-7-1-1	soft sed	30	2.64 ± 0.05	310	11.6 ± 0.9
7-1-2	sand gravel	5	no sample		
7-1-3	sandy mud	21	0.58 ± 0.01		11.9 ± 0.2
7-1-4	soft sed	50	3.01 ± 0.05		12.8 ± 0.4
7-1-5	soft sed	50	2.85 ± 0.06		14.2 ± 0.5
GC-7-1-5	soft sed	50	3.97 ± 0.10	>313	15.2 ± 0.7
<sup>b</sup> GC-7-1-M	soft sed	52	3.97 ± 0.12		19.5 ± 2.0
7-1-6	sand gravel		no sample		
7-2-1	soft sed	22	2.01 ± 0.05		11.0 ± 0.5
7-2-2	soft sed	55	3.04 ± 0.06		12.1 ± 0.5
GC-7-2-2	soft sed	57	4.30 ± 0.09	>436	14.9 ± 0.8
7-2-3	sand gravel	20	no sample		
7-2-4	sand gravel	16	0.91 ± 0.03		9.7 ± 0.3
7-2-5	soft sed	36	2.55 ± 0.06		12.1 ± 0.5
GC-7-2-5	soft sed	40	3.98 ± 0.10	>508	16.3 ± 0.8
7-2-6	soft sed	52	3.05 ± 0.06		14.0 ± 0.5
7-2-7	clay mud	53	2.86 ± 0.05		14.5 ± 0.4
GC-7-2-7	clay mud		4.02 ± 0.11	>205	16.5 ± 0.7
ROCKWD LAND	soil sed		1.25 ± 0.04	85	11.6 ± 0.6
NEW HOPE	sand gravel		0.18 ± 0.02	4	2.6 ± 0.2
7-3-1	soft sed	35	2.23 ± 0.04		12.9 ± 0.4
7-3-2	clay mud	25	2.68 ± 0.02		13.4 ± 0.2
7-3-3	soft sed	50	3.14 ± 0.06		13.3 ± 0.5
GC-7-3-4	soft sed	50	4.08 ± 0.04	>634	15.6 ± 0.4
7-3-4	soft sed	50	2.15 ± 0.03		11.0 ± 0.3

Sample Identification	Sample type <sup>a</sup>	Depth (ft)	<sup>137</sup> Cs (pCi/g)	<sup>137</sup> Cs (pCi/cm <sup>2</sup> )	<sup>40</sup> K (pCi/g)
7-3-5	soft sed	23	4.40 ± 0.05		15.3 ± 0.3
C-7-3-5	soft sed	23	3.36 ± 0.05	440	16.7 ± 0.7
7-3-6	soil sed	17	no sample		
7A-1-1	sandy mud	12	0.51 ± 0.02		7.6 ± 0.4
7A-1-2	soft sed	16	0.60 ± 0.02		6.7 ± 0.4
7A-1-3	clay mud	15	0.57 ± 0.02		8.9 ± 0.2
7A-1-4	clay mud	26	0.71 ± 0.02		11.0 ± 0.3
7A-1-5	soft sed		1.17 ± 0.03		11.5 ± 0.3
7A-1-6	soft sed	40	1.04 ± 0.03		12.2 ± 0.3
7A-1-7	sandy mud	39	0.62 ± 0.02		4.7 ± 0.2
7A-1-8	soft sed	25	1.29 ± 0.03		12.9 ± 0.4
7A-1-9	clay mud	32	1.36 ± 0.03		12.4 ± 0.3
7A-1-10	soft sed	45	2.14 ± 0.04		13.0 ± 0.4
GC-7A-1-10	soft sed		2.48 ± 0.05	124	13.5 ± 0.5
7A-1-11	sandy mud	30	1.69 ± 0.04		20.6 ± 0.6
7A-2-1	gravel		no sample		
7A-2-2	clay mud	20	2.06 ± 0.02		12.5 ± 0.2
GC-7A-2-2	soft mud	25	2.52 ± 0.04	>153	14.3 ± 0.4
8-1-1	soft sed	30	2.05 ± 0.03		15.6 ± 0.3
8-1-2	soft sed	35	2.36 ± 0.05		18.4 ± 0.5
GC-8-1-2	clay mud		2.05 ± 0.06	158	16.5 ± 0.7
8-1-3	soil gravel	33	no sample		
8-1-4	soft sed	55	2.73 ± 0.06		14.7 ± 0.5
GC-8-1-4	soft sed	55	3.44 ± 0.07	>627	14.6 ± 0.7
8-1-5	clay mud	32	3.95 ± 0.05		12.5 ± 0.4
GC-8-1-5	clay mud	32	3.20 ± 0.07	163	15.0 ± 0.7
8-1-6	soft mud	55	3.63 ± 0.07		15.9 ± 0.6
8-1-7	soft mud	57	3.38 ± 0.07		15.1 ± 0.6
GC-8-1-7	soft sed	55	3.79 ± 0.10	180	13.6 ± 1.0
8-2-1	soil gravel	45	no sample		
8-2-2	soft sed	60	2.90 ± 0.06		13.4 ± 0.5
8-2-3	soft sed	65	2.57 ± 0.05		12.5 ± 0.5
GC-8-2-3	soft sed	60	3.84 ± 1.00	343	14.7 ± 1.1
8-2-4	sandy mud	33	1.64 ± 0.02		13.7 ± 0.2
GC-8-2-4	sandy mud	30	1.76 ± 0.04	12	16.4 ± 0.5
8-3-1	soft sed		2.84 ± 0.06		13.6 ± 0.5
GC-8-3-1	soft sed		4.24 ± 0.05	>271	15.9 ± 0.5
8-3-2	sand gravel		no sample		
8-3-3	soft sed	20	2.02 ± 0.03		11.5 ± 0.3
GC-8-3-3	soil sed		1.71 ± 0.02	134	10.9 ± 0.2
9-1-1	soft sed	20	4.29 ± 0.05		15.7 ± 0.4
GC-9-1-1	sandy mud		2.52 ± 0.06	267	14.5 ± 0.6
9-1-2	soft sed	50	no sample		
GC-9-1-2	soft sed		2.55 ± 0.05	>505	11.7 ± 0.4
9-1-3	sandy soil	4	no sample		



Sample identification	Sample type <sup>a</sup>	Depth (ft)	<sup>137</sup> Cs (pCi/g)	<sup>137</sup> Cs (pCi/cm <sup>2</sup> )	<sup>40</sup> K (pCi/g)
9-1-3A	sandy soil	10	0.48 ± 0.01		5.4 ± 0.2
GC-9-1-3A	sandy soil		0.64 ± 0.02	6	6.8 ± 0.3
9-1-4	soil gravel	15	0.31 ± 0.02		11.3 ± 0.3
9-1-5	soil gravel		1.17 ± 0.03		10.2 ± 0.3
9-2-1	soil gravel	15	no sample		
9-2-2	soil gravel	18	no sample		
9-2-3	soft sed	30	2.17 ± 0.02		12.8 ± 0.2
9-2-4	soft sed	40	1.58 ± 0.02		6.4 ± 0.2
GC-9-2-4	soil sand	20	0.33 ± 0.03	1	6.4 ± 0.4
9-2-5	soft sed	35	2.46 ± 0.05		12.3 ± 0.5
9-2-6	soft sed	30	3.04 ± 0.05		11.5 ± 0.4
GC-9-2-6	soft sed	30	2.00 ± 0.07	>431	14.4 ± 0.7
9-2-7	soft sed	45	1.17 ± 0.05		11.0 ± 0.4
GC-9-2-7	soft sed	25	2.75 ± 0.07	298	13.9 ± 0.7
9-2-8	soft sed	40	3.16 ± 0.01		15.0 ± 0.6
GC-9-2-8	soft sed	30	3.31 ± 0.10	240	15.2 ± 0.9
9-2-9	soft sed	48	2.59 ± 0.02		14.9 ± 0.1
9-2-10	sandy mud	45	0.72 ± 0.01		12.2 ± 0.2
9-2-11	sandy mud	65	1.17 ± 0.05		11.7 ± 0.4
GC-9-2-11	sandy mud	25	0.18 ± 0.01	5	9.2 ± 0.2
9-3-1	clay sed	25	1.45 ± 0.03		9.9 ± 0.3
9-3-2	sand gravel		no sample		
9-3-3	clay sed	48	6.00 ± 0.05		12.6 ± 0.3
9-3-4	soft sed	69	2.65 ± 0.04		14.5 ± 0.3
GC-9-3-4	soft sed	63	2.79 ± 0.05	341	10.7 ± 0.3
9-3-5	soft sed	30	4.18 ± 0.05		16.1 ± 0.4
9-3-6	soft sed	39	2.65 ± 0.06		14.0 ± 0.5
9-3-7	clay sed	36	2.75 ± 0.04		12.9 ± 0.4
GC-9-3-7	soft sed	36	1.89 ± 0.06	339	12.1 ± 0.6
9-3-8	soil gravel	30	0.19 ± 0.02		6.3 ± 0.2
9-3-9	soft sed	36	1.92 ± 0.04		10.8 ± 0.4
9-4-1	clay sed	18	0.59 ± 0.02		5.1 ± 0.2
9-4-2	sandy mud	20	0.62 ± 0.01		4.5 ± 0.1
9-4-3	soft sed	48	2.46 ± 0.06		13.9 ± 0.5
GC-9-4-3	soft sed	42	2.51 ± 0.10	556	12.6 ± 1.1
9-4-4	sandy mud	42	2.04 ± 0.02		11.3 ± 0.2
9-4-5	soft sed	75	2.51 ± 0.06		13.0 ± 0.6
GC-9-4-5	soft sed	70	2.34 ± 0.04	122	13.2 ± 0.7
10-1-1	sandy mud	27	0.69 ± 0.03		5.9 ± 0.3
GC-10-1-2	soft sed	30	1.12 ± 0.04	108	10.8 ± 0.5
10-1-3	sandy mud	12	0.17 ± 0.01		2.6 ± 0.1
10-1-4	clay mud	15	0.40 ± 0.02		6.9 ± 0.3
10-2-1	soft sed	27	0.80 ± 0.02		10.5 ± 0.3
10-2-2	soft sed	22	0.73 ± 0.04		7.3 ± 0.4
GC-10-2-A	soft sed	30	0.82 ± 0.05	21	10.2 ± 0.5

Sample identification	Sample type <sup>a</sup>	Depth (ft)	<sup>137</sup> Cs (pCi/g)	<sup>137</sup> Cs (pCi/cm2)	<sup>40</sup> K (pCi/g)
10-3-1	sand gravel	17	0.05 ± 0.01		0.9 ± 0.1
10-3-2	sandy mud	24	0.64 ± 0.03		7.7 ± 0.3
GC-10-3-2	sandy mud		0.74 ± 0.06	9	8.3 ± 0.7
10-3-3	soft sed	24	0.59 ± 0.03		6.3 ± 0.3
10-3-4	soft sed	24	0.65 ± 0.01		7.0 ± 0.3
10-4-1	sandy mud	15	0.16 ± 0.04		3.1 ± 0.1
10-4-2	sandy mud	14	0.16 ± 0.02		3.0 ± 0.2
10-4-3	soil sed	10	0.32 ± 0.02		6.6 ± 0.3
10-4-4	soil sed	9	0.28 ± 0.02		5.9 ± 0.3
10-4-5	soil sed	15	0.27 ± 0.02		4.6 ± 0.3
10-4-6	sandy mud	15	0.18 ± 0.02		2.6 ± 0.2
10-5-1	soft sed	33	0.69 ± 0.01		5.8 ± 0.1
10-5-2	sand gravel	33	0.22 ± 0.02		4.4 ± 0.2
10-5-3	soft sed	36	1.44 ± 0.04		10.4 ± 0.4
GC-10-5-3	soft sed	36	1.01 ± 0.05	22	10.8 ± 0.6
11-1-1	sand	30	0.43 ± 0.01		3.6 ± 0.1
11-1-2	soft sed	45	2.89 ± 0.04		12.7 ± 0.3
11-1-3	soft sed	45	2.42 ± 0.02		12.7 ± 0.2
GC-11-1-3	soft sed	30	2.61 ± 0.06	250	12.8 ± 0.5
11-1-4	soft sed	75	2.76 ± 0.04		16.0 ± 0.4
11-1-5	sand gravel	15	0.45 ± 0.02		5.1 ± 0.2
11-1-6	soft sed	40	2.42 ± 0.02		11.4 ± 0.2
11-1-7	soft sed	40	2.78 ± 0.01		12.1 ± 0.3
11-1-8	soft sed	63	1.93 ± 0.03		11.1 ± 0.4
11-1-9	soft sed	55	2.45 ± 0.05		12.8 ± 0.5
GC-11-1-9	soft sed		2.44 ± 0.06	289	12.2 ± 0.5
11-1-10	soft sed		2.42 ± 0.05		11.0 ± 0.5
11-1-11	soft sed	45	1.83 ± 0.05		8.9 ± 0.4
11-2-1	soft sed	75	2.71 ± 0.01		15.0 ± 0.4
GC-11-2-1	soft sed	70	2.38 ± 0.08	397	11.7 ± 0.7
11-2-2	sandy mud	33	1.10 ± 0.01		13.0 ± 0.2
11-2-3	sand gravel	45	0.67 ± 0.01		11.9 ± 0.1
11-2-4	sand gravel	18	0.16 ± 0.01		6.1 ± 0.2
11-2-5	soft sed	33	1.96 ± 0.04		8.9 ± 0.3
GC-11-2-5	soft sed	35	2.32 ± 0.19	306	15.7 ± 2.3
11-2-5B	soft sed	30	1.78 ± 0.02		7.1 ± 0.1

<sup>a</sup>Sediment types: soft sed = soft mud recently deposited; clay mud = clayey mud cohesive; sandy mud = sandy mud or fine sands; sand = sand and gravel; soil gravel = soil submerged eroded bank materials.

<sup>b</sup>No inventory made: core only 24 cm long.

## INTERNAL DISTRIBUTION

- |                        |                                    |
|------------------------|------------------------------------|
| 1. S. M. Adams         | 73. L. E. McNeese                  |
| 2. L. W. Barnthouse    | 74. M. E. Mitchell                 |
| 3. S. M. Bartell       | 75. C. E. Nix                      |
| 4. L. D. Bates         | 76-85. C. R. Olsen                 |
| 5. B. G. Blaylock      | 86. P. T. Owen                     |
| 6. K. L. Brady         | 87. S. F. Railsback                |
| 7. G. E. Butterworth   | 88. J. W. Ranney                   |
| 8. T. R. Butz          | 89. D. E. Reichle                  |
| 9. J. S. Colley        | 90. P. S. Rohwer                   |
| 10. K. W. Cook         | 91. T. H. Row                      |
| 11. R. B. Cook         | 92. M. J. Sale                     |
| 12. C. C. Coutant      | 93. C. L. Stair                    |
| 13-22. K. C. Dearstone | 94. J. E. Stone                    |
| 23. E. L. Etneir       | 95. S. H. Stow                     |
| 24. M. P. Farrell      | 96. G. W. Suter                    |
| 25-34. C. J. Ford      | 97. D. W. Swindle                  |
| 35. M. L. Frank        | 98. C. C. Travis                   |
| 36. C. E. Frye         | 99-108. R. R. Turner               |
| 37. C. W. Gehrs        | 109. R. I. Van Hook                |
| 38. M. Gentry          | 110. W. Van Winkle                 |
| 39. J. Grebmeier       | 111. K. Von Damm                   |
| 40. C. S. Haase        | 112. L. D. Voorhees                |
| 41. J. L. Haymore      | 113. S. H. Welch                   |
| 42. S. G. Hildebrand   | 114. R. K. White                   |
| 43. F. O. Hoffman      | 115. L. F. Willis                  |
| 44. L. A. Hook         | 116. Central Research Library      |
| 45. D. D. Huff         | 117. Enrichment Tech. Library      |
| 46. S. V. Kaye         | 118-137. ER Document Manag. Center |
| 47. C. Kimbrough       | 138-157. ESD Library               |
| 48-57. B. L. Kimmel    | 158-159. Laboratory Records Dept.  |
| 58-67. I. L. Larsen    | 160. Laboratory Records, RC        |
| 68. J. M. Loar         | 161. ORNL Patent Section           |
| 69. L. W. Long         | 162. PGDP Library                  |
| 70. P.-Y. Lu           | 163. X-710 Library (Portsmouth)    |
| 71. A. P. Malinauskas  | 164. Y-12 Technical Library        |
| 72. L. W. McMahon      |                                    |

## EXTERNAL DISTRIBUTION

165. J. J. Alberts, University of Georgia Marine Institute, Sapelo Island, GA 31327
166. L. K. Benninger, Department of Geology, University of North Carolina, Chapel Hill, NC 27514
167. R. F. Bopp, Department of Environmental Science, Barnard College, New York, NY 10027
168. M. H. Bothner, U.S. Geological Survey, Woods Hole, MA 02543

169. O. P. Bricker, U.S. Geological Survey, Water Resources MS 431, Reston, VA 22092
170. Ralph Brooks, TVA, 140 Evans Building, Office of Water Resources, Knoxville, TN 37902
171. G. R. Choppin, Department of Chemistry, Florida State University, Tallahassee, FL 32306
172. T. M. Church, College of Marine Studies, University of Delaware, Newark, DE 19716
173. J. M. Cleveland, U.S. Geological Survey, P.O.Box 25046, Denver Federal Center, Denver, CO 80225
174. R. R. Colwell, Director, Maryland Biotechnology Institute, Microbiology Building, University of Maryland, College Park, MD 20742
175. R. J. Cornett, Environmental Research Branch, Chalk River Nuclear Laboratories, Chalk River, Ontario KOJ 1J0, CANADA
176. D. Dycus, TVA, 270 Haney Building, Chattanooga, TN 37402
177. J. Dominik, Institut F.-A. Forel, Universite de Geneve, 1290 Versoix, SWITZERLAND
178. J. Donoghue, Department of Geology, Florida State University, Tallahassee, FL 32306
179. J. Duguid, Battelle Project Management Division, 2030 M St. NW, Washington, DC 20036
180. D. N. Edgington, Great Lake Studies, P.O. Box 413, University of Wisconsin, Milwaukee, Milwaukee, WI 53201
181. E. H. Essington, Los Alamos Scientific Laboratory, University of California, P.O. Box 1663, Los Alamos, NM 87545
182. J. P. Fehring, TVA, 270 Haney Building, Chattanooga, TN 37402
183. C. Gist, Oak Ridge Operations, U.S. Department of Energy, Oak Ridge, TN 37830
184. S. Glover, Oak Ridge Operations, U.S. Department of Energy, Oak Ridge, TN 37830
185. D. S. Gorsline, Department of Geological Sciences, University of Southern California, Los Angeles, CA 90007
186. T. E. Hakonson, Environmental Sciences Group, Los Alamos National Laboratory, Los Alamos, NM 87545
187. D. H. Hamilton, Office of Health and Environmental Research, ER-75, Office of Energy Research, U.S. Department of Energy, Washington, DC 20545
188. A. S. Hammons, Science Applications Inc., 800 Oak Ridge Turnpike, Oak Ridge, TN 37830
189. M. Heits, Environmental Measurements Laboratory, 376 Hudson Street, New York, NY 10014
190. R. A. Hites, Department of Chemistry, Indiana University, 400 East 7th Street, Bloomington, IN 47405
191. G. M. Hornberger, Professor, Department of Environmental Sciences, University of Virginia, Charlottesville, VA 22903
192. J. W. Huckabee, Manager, Ecological Studies Program, Electric Power Research Institute, 3412 Hillview Avenue, P.O. Box 10412, Palo Alto, CA 94303
193. George Y. Jordy, Director, Office of Program Analysis, Office of Energy Research, ER-30, G-226, U.S. Department of Energy, Washington, DC 20545

- 194. T. Joseph, Oak Ridge Operations, U.S. Department of Energy, Oak Ridge, TN 37830
- 195. S. A. Kuehl, Department of Geology, University of South Carolina, Columbia, SC 29208
- 196-200. E. Leming, TDHE, 1605 Prosser Road, Knoxville, TN 37914-3434
- 201. G. E. Likens, Director, The New York Botanical Garden, Institute of Ecosystem Studies, The Mary Flagler Cary Arboretum, Box AB, Millbrook, NY 12545
- 202. P. Linsalata, New York University Medical Center, Institute of Environmental Medicine, Long Meadow Road, Tuxedo, NY 10987
- 203-212. P. D. Lowry, Department of Anesthesiology, Emory University School of Medicine, Atlanta, GA 30322
- 213. J.-M. Martin, Institut De Biogeochimie Marine, Ecole Normale Supérieure, 1, rue Maurice Arnoux, F92120 Montrouge, FRANCE
- 214. J. S. Mattice, Electric Powre Research Institute, P.O. Box 10412, Palo Alto, CA 94303
- 215. L. Mayer, Department of Oceanography, University of Maine, Walpole, ME 04573
- 216. Helen McCammon, Director, Ecological Research Division, Office of Health and Environmental Research, Office of Energy Research, ER-75, U.S. Department of Energy, Washington, DC 20545
- 217. A. D. McKinney, TWRA, P.O. Box 40747, Ellington Agricultural Center, Nashville, TN 37204
- 218. R. I. McLean, Department of Natural Resources, State of Maryland, Tawes State Office Building, Annapolis, MD 21401
- 219. R. H. Meade, Water Resources Division, U.S. Geological Survey, Denver, CO 80225
- 220. R. L. Miller, Earth Resources Laboratory, Earth Sciences Research Division, HA10 Bldg. 1100, Stennis Space Center, MS 39529
- 221-230. C. R. Moriones, Health Physics Research Division, Philippine Atomic Energy Commission, P.O. Box 213 U.P. Diliman, Quezon City, PHILIPPINES
- 231. J. V. Nabholz, Health and Environmental Review Division, Environmental Protection Agency, 401 M Street, SW, Washington, DC 20460
- 232. A. S. Naidu, Institute of Marine Science, University of Alaska, Fairbanks, AK 99701
- 233. D. M. Nelson, Radiological and Environmental Research Division, Argonne National Laboratory, Argonne, IL 60439
- 234. M. M. Nichols, Virginia Institute of Marine Science, Gloucester Point, VA 23062
- 235. C. Nolan, International Laboratory of Marine Radioactivity, IAEA, 2, av Prince Hereditaire Albert, 98000 MONACO
- 236. V. E. Noshkin, International Laboratory of Marine Radioactivity, IAEA, 2, av Prince Hereditaire Albert, 98000 MONACO
- 237. J. O. Nriagu, National Water Research Institute, Canada Centre for Inland Waters, Burlington, Ontario L7R 4A6, CANADA

- 238. W. S. Osburn, Jr., Ecological Research Division, ER-75, Office of Health and Environmental Research, Department of Energy, Washington, DC 20545
- 239. R. Paris, Oregon State Health Division, Department of Human Resources, 1400 SW 5th Avenue, Portland, OR 97201
- 240. F. L. Parker, Vanderbilt University, Nashville, TN 37240
- 241. R. W. Perkins, Pacific Northwest Laboratories, P.O. Box 999, Richland, WA 99352
- 242. J. Porter, Director, Environmental Sciences Section, Savannah River Laboratory, Aiken, SC 29801
- 243. J. Robbins, Great Lakes Environmental Research Laboratory, Ann Arbor, MI 48104
- 244. E. J. Rykiel, Department of Industrial Engineering, Biosystems Research Division, Texas A&M University, College Station, TX 77843
- 245. P. H. Santschi, Department of Oceanography, Texas A&M University, College Station, TX 77843
- 246. G. W. Saunders, Jr., Office of Health and Environmental Research, ER-75, Office of Energy Research, U.S. Department of Energy, Washington, DC 20545
- 247. W. R. Schell, Department of Radiation Health, University of Pittsburgh, Pittsburgh, PA 15261
- 248. W. Schacher, TWRA, 4600 Appleby Road, Knoxville, TN 37920
- 249. J. R. Schubel, Marine Sciences Research Center, State University of New York, Stony Brook, NY 11794
- 250. M. R. Scott, Department of Oceanography, Texas A&M University, College Station, TX 77843
- 251. J. Skei, Norwegian Institute for Water Research, P.B. 333 Blindern, 0314 Oslo 3, NORWAY
- 252-271. R. Sleeman, Research and Waste Management Division, ER-12, Oak Ridge Operations, U.S. Department of Energy, Oak Ridge, TN 37830
- 272. J. N. Smith, Department of Fisheries and Oceans, Bedford Institute of Oceanography, Dartmouth, Nova Scotia B2Y 4A2, CANADA
- 273. J. Steele, Lee Wan & Associates, 120 S. Jefferson Circle, Oak Ridge, TN 37830
- 274. P. Supaokit, Office of Atomic Energy for Peace, Thanon Vibhavadi Rangsit, Bangkok, Bangkok, 10900 THAILAND
- 275. D. J. P. Swift, Department of Oceanography, Old Dominion University, Norfolk, VA 23508
- 276. G. Toombs, Oregon State Health Division, Department of Human Resources, 1400 SW 5th Avenue, Portland, OR 97201
- 277. K. K. Turekian, Department of Geology and Geophysics, Yale University, New Haven, CT 06520
- 278. H. L. Windom, Skidaway Institute of Oceanography, P.O. Box 13687, Savannah, GA 31406
- 279. Frank J. Wobber, Ecological Research Division, Office of Health and Environmental Research, Office of Energy Research, ER-75, U.S. Department of Energy, Washington, DC 20545

280. R. W. Wood, Director, Office of Health and Environmental Research, Office of Energy Research, Department of Energy, Washington, DC 20545
281. Office of Assistant Manager for Energy Research and Development, Oak Ridge Operations, P.O. Box 2001, U.S. Department of Energy, Oak Ridge, TN 37831-8600